



When the System Program Switch on the KX-T30810B is set to the PROGRAM position, the operation of the KX-T7030 and the KX-T7130 will change as follows.

### KX-T7030

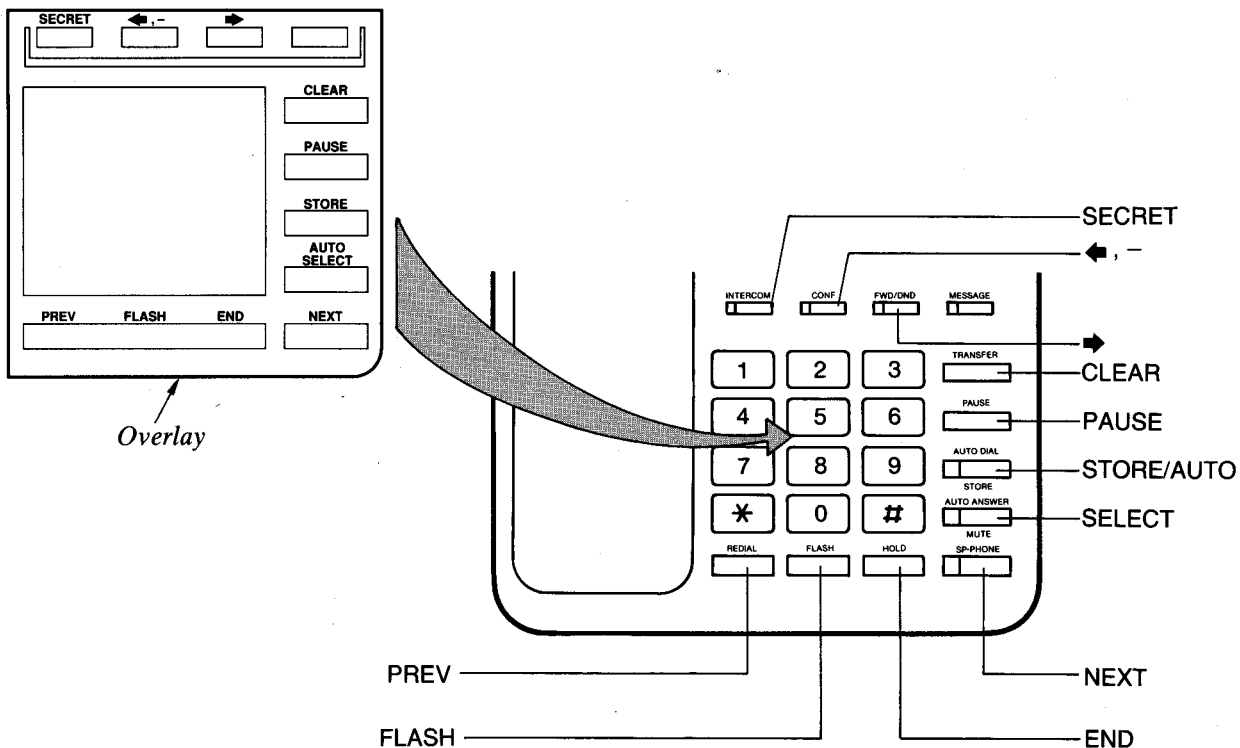

### KX-T7130

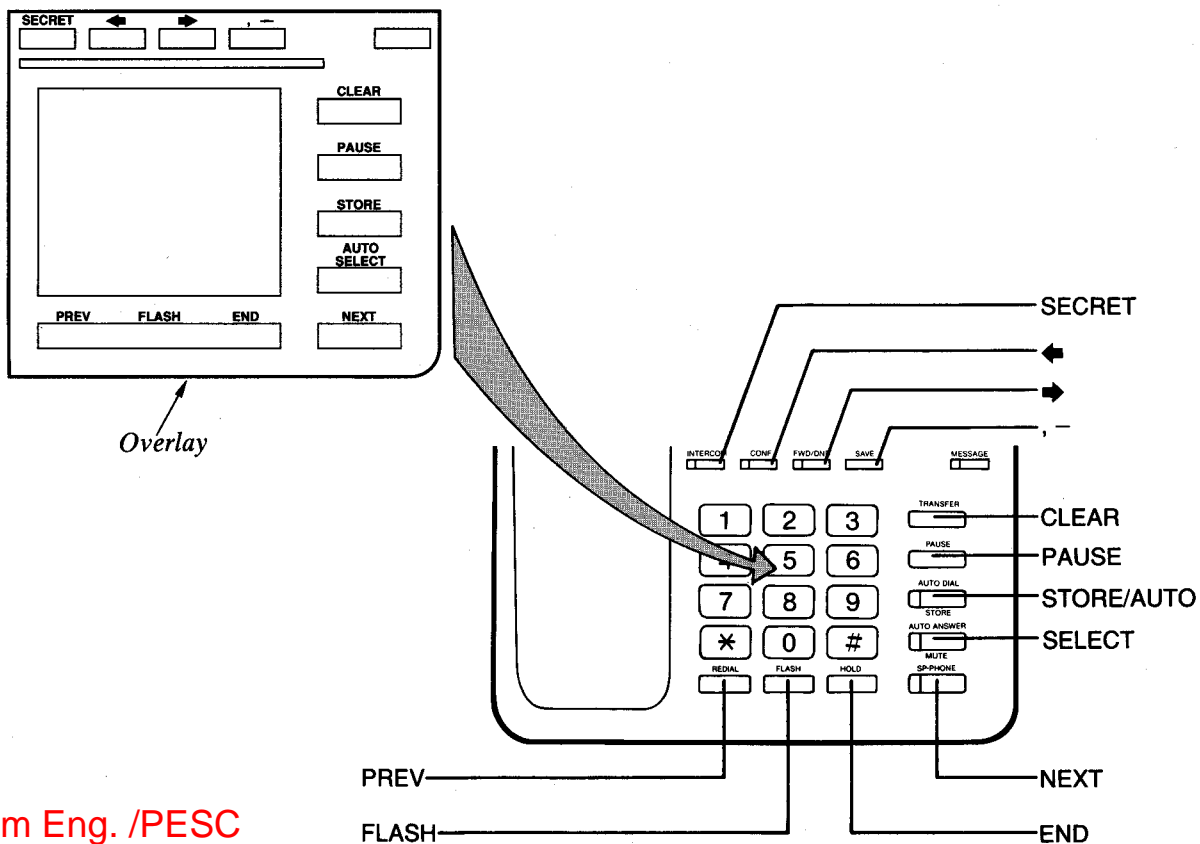

<b>TO SET</b>	<b>PROGRAM ADDRESS</b>	<b>STEPS REQUIRED TO CHANGE PROGRAM</b>
---------------	------------------------	---

Date and Time	[00]	<p>[A] [⇔] [SELECT] [⇔] [B] [⇔] [SELECT] [⇔] [C] [⇔] [D] [⇔] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;"> <span style="margin-right: 20px;">└--year</span> <span style="margin-right: 20px;">└--month</span> <span style="margin-right: 20px;">└--day</span> <span style="margin-right: 20px;">└--hour</span> <span style="margin-right: 20px;">└--minute</span> <span style="margin-right: 20px;">└--AM/PM</span> <span style="margin-left: 20px;">└--day of the week</span> </p>
---------------	------	--

System Speed Calling Entry	[01] or [AUTO]	<p>[AB] [CD] [phone number] [MEMORY]</p> <p style="margin-left: 20px;"> <span style="margin-right: 20px;">└-----</span> [9]: automatic line access number  <span style="margin-right: 20px;">└-----</span> [81] through [83]: outside line access number  <span style="margin-right: 20px;">└-----</span> [00] through [79]: speed access code         </p> <p>•To advance to the next code.          [SELECT] [AB] [CD] [phone number] [MEMORY]</p> <p>•To exit the speed calling entry, press [END].</p>
----------------------------	----------------	--

System Speed Calling —Class Assignment	[02]	<p>[SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└-- until the desired boundary class appears</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>CLASS 1</td> <td style="text-align: center;">x</td> <td></td> </tr> <tr> <td>CLASS 2</td> <td></td> <td></td> </tr> <tr> <td>CLASS 3</td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change	CLASS 1	x		CLASS 2			CLASS 3		
	Default	To make program change												
CLASS 1	x													
CLASS 2														
CLASS 3														

Dial Mode (Tone/Pulse) Selection	[03]	<p>[NEXT] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└----- TONE/PULSE</p> <p style="margin-left: 20px;">└-- until the desired CO number appears</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th colspan="3" style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>CO(s)</td> <td style="text-align: center;">all CO's</td> <td style="text-align: center;">1</td> <td style="text-align: center;">2</td> <td style="text-align: center;">3</td> </tr> <tr> <td>Pulse mode</td> <td style="text-align: center;">x</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Tone (DTMF) mode</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			CO(s)	all CO's	1	2	3	Pulse mode	x				Tone (DTMF) mode				
	Default	To make program change																				
CO(s)	all CO's	1	2	3																		
Pulse mode	x																					
Tone (DTMF) mode																						

Switching Mode (Day/Night Service)	[04]	<p>[SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;">└----- MAN/AUTO</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Manual</td> <td style="text-align: center;">x</td> <td></td> </tr> <tr> <td>Automatic</td> <td></td> <td style="text-align: center;">✓</td> </tr> </tbody> </table>		Default	To make program change	Manual	x		Automatic		✓
	Default	To make program change									
Manual	x										
Automatic		✓									

Starting Time (Day/Time)	[05]	<p>[A] [⇔] [B] [⇔] [SELECT] [MEMORY] [NEXT] [C] [⇔] [D] [⇔] [SELECT] [MEMORY] [END]</p> <p style="margin-left: 20px;"> <span style="margin-right: 20px;">└--minute</span> <span style="margin-right: 20px;">└--AM/PM</span> <span style="margin-right: 20px;">└--minute</span> <span style="margin-right: 20px;">└--AM/PM</span> </p> <p style="margin-left: 20px;">└-- starting time for day service (hour)      └-- starting time for night service (hour)</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th colspan="6" style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Day plan</td> <td style="text-align: center;">9:00 AM</td> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Night plan</td> <td style="text-align: center;">5:00 PM</td> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change						Day plan	9:00 AM							Night plan	5:00 PM						
	Default	To make program change																								
Day plan	9:00 AM																									
Night plan	5:00 PM																									

Flexible Day Outward Dialing Assignment	[06]	<p>[NEXT] [C...E] [MEMORY] [END]</p> <p style="margin-left: 20px;">└----- CO number</p> <p style="margin-left: 20px;">└-- until the desired extension number appears</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th colspan="8" style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td style="text-align: center;">11</td><td style="text-align: center;">12</td><td style="text-align: center;">13</td><td style="text-align: center;">14</td><td style="text-align: center;">15</td><td style="text-align: center;">16</td><td style="text-align: center;">17</td><td style="text-align: center;">18</td> </tr> <tr> <td>CO 1</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 2</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 3</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	CO 1	x									CO 2	x									CO 3	x								
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
CO 1	x																																																			
CO 2	x																																																			
CO 3	x																																																			

Flexible Night Outward Dialing Assignment	[07]	<p>[NEXT] [C...E] [MEMORY] [END]</p> <p style="margin-left: 20px;">└----- CO number</p> <p style="margin-left: 20px;">└-- until the desired extension number appears</p> <table border="1" style="width:100%; border-collapse: collapse; margin-left: 40px;"> <thead> <tr> <th style="width:40%;"></th> <th style="width:20%; text-align: center;">Default</th> <th colspan="8" style="width:40%; text-align: center;">To make program change</th> </tr> </thead> <tbody> <tr> <td>Extensions</td> <td style="text-align: center;">all extensions</td> <td style="text-align: center;">11</td><td style="text-align: center;">12</td><td style="text-align: center;">13</td><td style="text-align: center;">14</td><td style="text-align: center;">15</td><td style="text-align: center;">16</td><td style="text-align: center;">17</td><td style="text-align: center;">18</td> </tr> <tr> <td>CO 1</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 2</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>CO 3</td> <td style="text-align: center;">x</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	CO 1	x									CO 2	x									CO 3	x								
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
CO 1	x																																																			
CO 2	x																																																			
CO 3	x																																																			

<b>TO SET</b>	<b>PROGRAM ADDRESS</b>	<b>STEPS REQUIRED TO CHANGE PROGRAM</b>
---------------	------------------------	---

*Flexible Day Ringing Assignment*

[08]

[NEXT] [C...E] [MEMORY] [END]  
     └----- CO number  
     └----- until the desired extension number appears

	<b>Default</b>	<b>To make program change</b>							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

*Flexible Night Ringing Assignment*

[09]

[NEXT] [C...E] [MEMORY] [END]  
     └----- CO number  
     └----- until the desired extension number appears

	<b>Default</b>	<b>To make program change</b>							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

*Toll Restriction—Class Assignment*

[10]

[NEXT] [SELECT] [MEMORY] [END]  
     └----- CLASS 1/2/3  
     └----- until the desired extension number appears

	<b>Default</b>	<b>To make program change</b>							
<i>Extensions</i>	<i>all extensions</i>	11	12	13	14	15	16	17	18
Class 1	x								
Class 2									
Class 3									

*Toll Restriction—Denied Codes Assignment*

[11]

[NEXT] [C] [MEMORY] [END]  
     └--- phone number with 7 digits  
     └----- until the desired memory location number appears

	<b>Memory location number</b>				
	00	01	02	03	04
<i>Phone number entry</i>					
	05	06	07	08	09
	10	11	12	13	14
	15	16	17	18	19

*Toll Restriction—Exceptional Codes Assignment*

[12]

[NEXT] [C] [MEMORY] [END]  
     └--- phone number with 7 digits  
     └----- until the desired memory location number appears

	<b>Memory location number</b>				
	00	01	02	03	04
<i>Phone number entry</i>					
	05	06	07	08	09
	10	11	12	13	14
	15	16	17	18	19

**TO SET**

**PROGRAM ADDRESS**

**STEPS REQUIRED TO CHANGE PROGRAM**

HOST PBX Access Codes Assignment

[13]

[NEXT] [A...D] [MEMORY] [END]

-----Up to four outside access codes each with a maximum of 2 digits  
-----until the desired CO numbers appears

CO	Outside access codes of the host PBX			
1				
2				
3				

Automatic Answering (Automatic/Manual) Selection

[14]

[NEXT] [SELECT] [MEMORY] [END]

-----AUTO ANSWER/MAN ANSWER  
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Automatic	x								
Manual									

Preferred Line Assignment

[15]

[NEXT] [SELECT] [MEMORY] [END]

-----..... (none)/CO 1/CO 2/CO 3  
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
• • • • (none)	x								
CO 1									
CO 2									
CO 3									

Programmable Call Waiting

[16]

[NEXT] [SELECT] [MEMORY] [END]

-----ENABLE/DISABLE  
-----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Disable	x								
Enable									

Duration Time Count Start Mode

[17]

[SELECT] [MEMORY] [END]

-----INSTANTLY/5S AFTER DIAL/10S AFTER DIAL

	Default	To make program change		
Instantly				
5S after dial	x			
10S after dial				

Hookswitch Flash Timing

[18]

[NEXT] [SELECT] [MEMORY] [END]

-----300 MS/600 MX/900 MS  
-----until the desired extension number appears

	Default	To make program change		
CO (s)	all CO's	1	2	3
300 msec				
600 msec	x			
900 msec				

Disconnect Time

[19]

[NEXT] [SELECT] [MEMORY] [END]

-----1.5 SEC/4.0 SEC  
-----until the desired CO number appears

	Default	To make program change		
CO (s)	all CO's	1	2	3
1.5 sec	x			
4.0 sec				

TO SET	PROGRAM ADDRESS	STEPS REQUIRED TO CHANGE PROGRAM																																																		
Calling Party Control (CPC) Signal	[20]	<p>[NEXT] [SELECT] [MEMORY] [END]            ----- TONE CALL/VOICE CALL            -----until the desired CO number appears</p> <table border="1" data-bbox="443 182 1202 286"> <thead> <tr> <th></th> <th>Default</th> <th colspan="3">To make program change</th> </tr> <tr> <td>CO (s)</td> <td>all CO's</td> <td>1</td> <td>2</td> <td>3</td> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			CO (s)	all CO's	1	2	3	Enable	×				Disable																																		
	Default	To make program change																																																		
CO (s)	all CO's	1	2	3																																																
Enable	×																																																			
Disable																																																				
Intercom Alerting Mode	[21]	<p>[NEXT] [SELECT] [MEMORY] [END]            ----- TONE CALL/VOICE CALL            -----until the desired extension number appears</p> <table border="1" data-bbox="443 390 1202 503"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Tone call</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Voice call</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Tone call	×									Voice call																			
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Tone call	×																																																			
Voice call																																																				
Programmable Doorphone	[22]	<p>[NEXT] [SELECT] [MEMORY] [END]            -----D-PHONE 1, 2/1/2/... (deny the ringing)            -----until the desired extension number appears</p> <table border="1" data-bbox="443 607 1202 737"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Doorphone 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Doorphone 2</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>deny the ringing</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Doorphone 1	×									Doorphone 2	×									deny the ringing									
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Doorphone 1	×																																																			
Doorphone 2	×																																																			
deny the ringing																																																				
Dial Call Pickup Group Assignment	[23]	<p>[NEXT] [SELECT] [MEMORY] [END]            ----- PICKUP-G:1/2/1, 2/... (out of the group)            -----until the desired extension number appears</p> <table border="1" data-bbox="443 841 1202 980"> <thead> <tr> <th></th> <th>Default</th> <th colspan="8">To make program change</th> </tr> <tr> <td>Extensions</td> <td>all extensions</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> </tr> </thead> <tbody> <tr> <td>Pickup Group 1</td> <td>×</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Pickup Group 2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>out of the group</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change								Extensions	all extensions	11	12	13	14	15	16	17	18	Pickup Group 1	×									Pickup Group 2										out of the group									
	Default	To make program change																																																		
Extensions	all extensions	11	12	13	14	15	16	17	18																																											
Pickup Group 1	×																																																			
Pickup Group 2																																																				
out of the group																																																				
Busy Tone Selection	[24]	<p>[SELECT] [MEMORY] [END]            ----- TONE 1/2</p> <table border="1" data-bbox="443 1058 1202 1137"> <thead> <tr> <th></th> <th>Default</th> <th colspan="3">To make program change</th> </tr> <tr> <td>Tone 1</td> <td>×</td> <td></td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>Tone 2</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change			Tone 1	×				Tone 2																																							
	Default	To make program change																																																		
Tone 1	×																																																			
Tone 2																																																				
Hold Recall Time Set	[26]	<p>[SELECT] [MEMORY] [END]            ----- 30SEC/1 MIN/2 MIN/3 MIN/4 MIN/5 MIN/DISABLE</p> <table border="1" data-bbox="443 1215 1202 1319"> <thead> <tr> <th></th> <th>30 seconds</th> <th>1 minute</th> <th>2 minutes</th> <th>3 minutes</th> <th>4 minutes</th> <th>5 minutes</th> <th>disable</th> </tr> </thead> <tbody> <tr> <td>Default</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>To make program change</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	disable	Default								To make program change																																	
	30 seconds	1 minute	2 minutes	3 minutes	4 minutes	5 minutes	disable																																													
Default																																																				
To make program change																																																				
Programmable External Paging Access Tone	[27]	<p>[SELECT] [MEMORY] [END]            ----- ENABLE/DISABLE</p> <table border="1" data-bbox="443 1397 1202 1475"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		Enable	×			Disable																																									
	Default	To make program change																																																		
Enable	×																																																			
Disable																																																				
DTMF Receiver Check	[28]	<p>[NEXT][SELECT][MEMORY][END]            ----- ENABLE/DISABLE            -----until the desired DTMF receiver appears</p> <table border="1" data-bbox="443 1579 1202 1692"> <thead> <tr> <th></th> <th>Default</th> <th colspan="2">To make program change</th> </tr> <tr> <td>DTMF receiver</td> <td>1, 2</td> <td>1</td> <td>2</td> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>×</td> <td></td> <td></td> </tr> <tr> <td>Disable</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Default	To make program change		DTMF receiver	1, 2	1	2	Enable	×			Disable																																					
	Default	To make program change																																																		
DTMF receiver	1, 2	1	2																																																	
Enable	×																																																			
Disable																																																				

**TO SET**      **PROGRAM ADDRESS**      **STEPS REQUIRED TO CHANGE PROGRAM**

*Programmable Secret Auto Dial*

[29]

[SELECT] [MEMORY] [END]  
 -----NO SECRET/SECRET

	Default	To make program change							
No secret	x								
Secret									

*Transfer Recall Time*

[30]

[SELECT] [MEMORY] [END]  
 -----30 SEC/2 MIN

	Default	To make program change							
30 sec	x								
2 min									

*Automatic Designated CO Line Access*

[31]

[NEXT] [C...E] [MEMORY] [END]  
 -----CO number  
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
CO 1	x								
CO 2	x								
CO 3	x								

*Programmable Call Waiting Tone*

[32]

[NEXT] [SELECT] [MEMORY] [END]  
 -----TONE 1/TONE 2  
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Tone 1	x								
Tone 2									

*Programmable Executive Override*

[33]

[NEXT] [SELECT] [MEMORY] [END]  
 -----ENABLE/DISABLE  
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Enable									
Disable	x								

*Standard Telephone Connection with Proprietary Telephone*

[34]

[NEXT] [SELECT] [MEMORY] [END]  
 -----ENABLE/DISABLE  
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Enable									
Disable	x								

*FI/SAVE Selection (for KX-T30850, KX-T7020, KX-T7030, KX-T7050)*

[35]

[NEXT] [SELECT] [MEMORY] [END]  
 -----FEATURE KEY/SAVE KEY  
 -----until the desired extension number appears

	Default	To make program change							
Extensions	all extensions	11	12	13	14	15	16	17	18
Feature Key	x								
Save Key									

*Selectable Call-on-Hold Music Source*

[36]

[SELECT] [MEMORY] [END]  
 -----INTERNAL/EXTERNAL

	Default	To make program change							
Internal	x								
External									

*Station Program Clear*

[98]

[NEXT] [MEMORY] [END]

*System Clear*

[99]

[NEXT] [MEMORY] [END]