


Power Integrated Module (PIM)


■ Features

- Included Rectifier and Brake Chopper
- Square RBSOA
- Low Saturation Voltage
- Overcurrent Limiting Function
(~ 3 Times Rated Current)

■ Equivalent Circuit

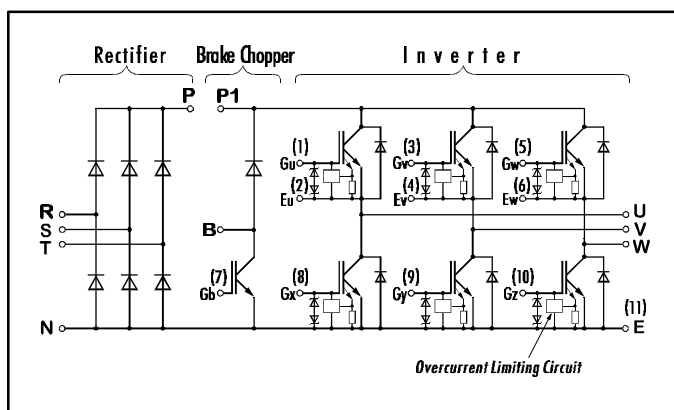

■ Outline Drawing

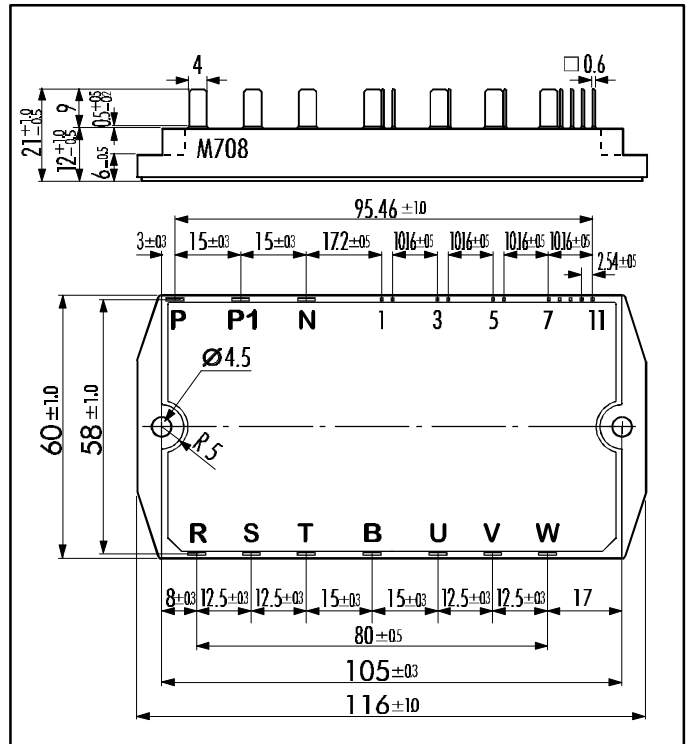

■ Absolute Maximum Ratings (T_c=25°C)

Items		Symbols	Test Conditions	Ratings	Units
Inverter	Collector-Emitter Voltage	V _{CES}		600	V
	Gate -Emitter Voltage	V _{GES}		± 20	
	Collector Current	I _C	Continuous	50	A
		I _{C PULSE}	1ms	100	
		-I _{C PULSE}	1ms	50	
Collector Power Dissipation	P _C	1 device	200	W	
Rectifier	Repetitive Peak Reverse Voltage	V _{RRM}		800	V
	Non Repetitive Peak Reverse Voltage	V _{RSM}		900	
	Average Output Current	I _O	50Hz/60Hz sin. wave	50	A
	Surge Current (Non Repetitive)	I _{FSM}	T _j =150°C, 10ms	350	
	I ² t (Non Repetitive)		T _j =150°C, 10ms	648	
Brake Chopper FWD IGBT	Collector-Emitter Voltage	V _{CES}		600	V
	Gate -Emitter Voltage	V _{GES}		± 20	
	Collector Current	I _C	Continuous	50	A
		I _{C PULSE}	1ms	100	
	Collector Power Dissipation	P _C	1 device	200	W
	Repetitive Peak Reverse Voltage	V _{RRM}		600	V
	Average Forward Current	I _{F(AV)}		1	A
	Surge Current	I _{FSM}	10ms	50	
	Operating Junction Temperature	T _j		+150	°C
	Storage Temperature	T _{Stg}		-40 ~ +125	
Isolation Voltage	V _{ISO}	A.C. 1min.	2500	V	
Mounting Screw Torque *1			1.7	Nm	

Note: *1:Recommendable Value; 1.3 ~ 1.7 Nm (M4)


■ Electrical Characteristics ($T_j=25^\circ\text{C}$)

Items		Symbols	Test Conditions	Min.	Max.	Units	
Inverter	IGBT	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=600V$		1.0	mA
		Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$		20	μA
		Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=50\text{mA}$	4.5	7.5	V
		Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=50A$		2.9	
		Input capacitance	C_{ies}	$f=1\text{MHz}$, $V_{GE}=0V$, $V_{CE}=10V$	3300 (typ.)		pF
		Turn-on Time	t_{on}	$V_{CC} = 300V$ $I_C = 50A$		1.2	μs
			t_r			0.6	
Turn-off Time	t_{off}	$V_{GE} = \pm 15V$ $R_G = 51\Omega$		1.0	μs		
	t_f			0.35			
FWD	Diode Forward On-Voltage	V_F	$I_F=50A$ $V_{GE}=0V$		3.1	V	
	Reverse Recovery Time	t_{rr}	$I_F=50A$		350	ns	
Rectif.	Forward Voltage	V_{FM}	$I_F = 50A$		1.55	V	
	Reverse Current	I_{RRM}	$V_R = 800V$		1.0	mA	
Brake Chopper	IGBT	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=600V$		1.0	mA
		Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$		100	nA
		Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=50A$		2.8	V
		Turn-on Time	t_{on}	$V_{CC} = 300V$ $I_C = 50A$		0.8	μs
			t_r			0.6	
		Turn-off Time	t_{off}	$V_{GE} = \pm 15V$ $R_G = 51\Omega$		1.0	μs
			t_f			0.35	
FWD	Reverse Current	I_{RRM}	$V_R=600V$		1.0	mA	
	Reverse Recovery Time	t_{rr}			600	ns	


■ Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Max.	Units
Thermal Resistance (1 device)	$R_{th(j-c)}$	Inverter IGBT		0.63	$^\circ\text{C/W}$
		Inverter FRD		1.60	
		Brake IGBT		0.63	
		Converter Diode		2.10	
Contact Thermal Resistance	$R_{th(c-f)}$	With Thermal Compound	0.05 (typ.)		


Collector current vs. Collector-Emitter voltage
 $T_j=25^\circ\text{C}$

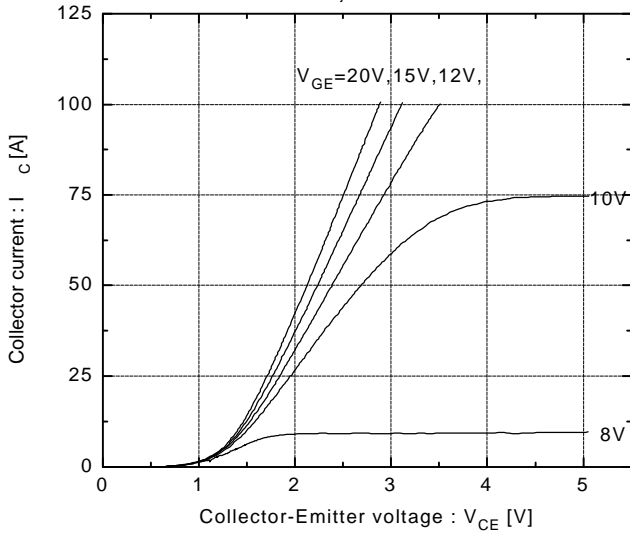


Collector current vs. Collector-Emitter voltage
 $T_j=125^\circ\text{C}$

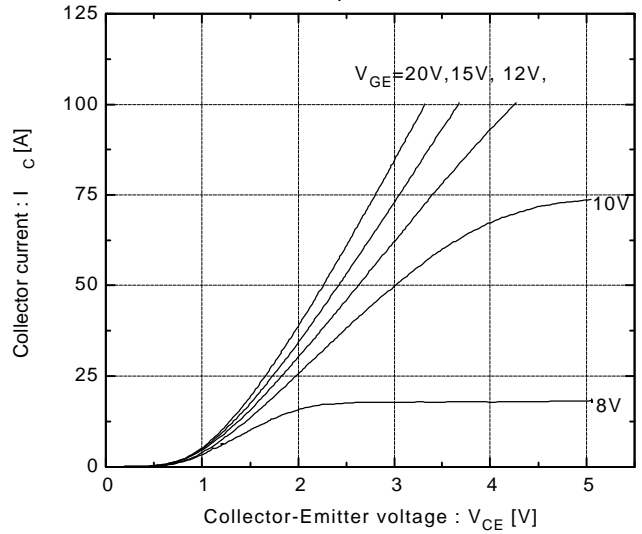


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=25^\circ\text{C}$

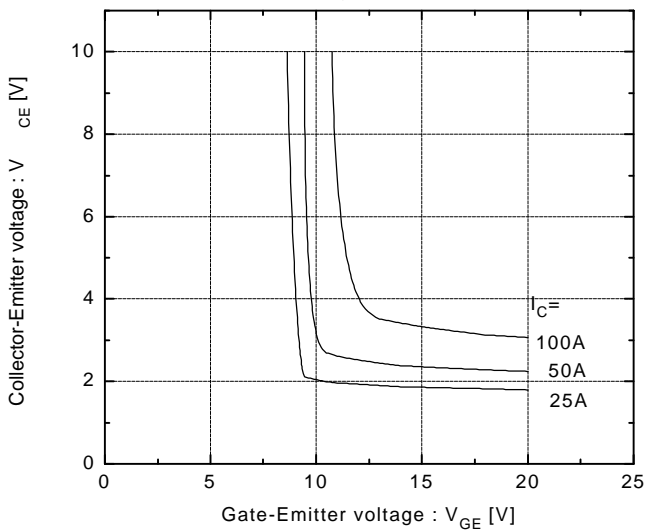


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=125^\circ\text{C}$






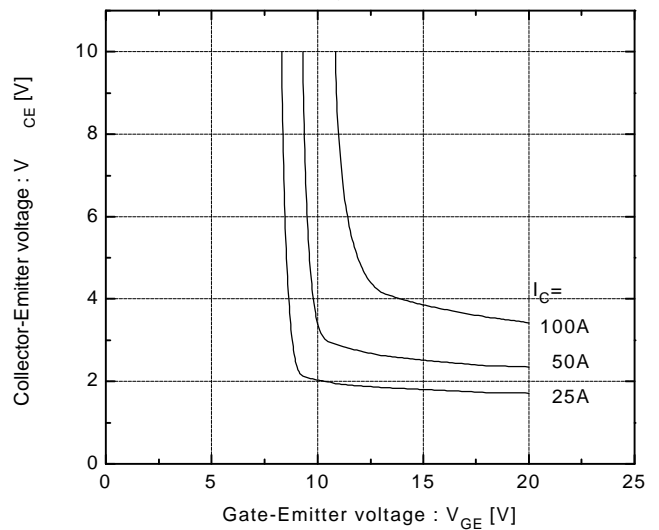


Switching time vs. Collector current
 $V_{CC}=300\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=25^\circ\text{C}$

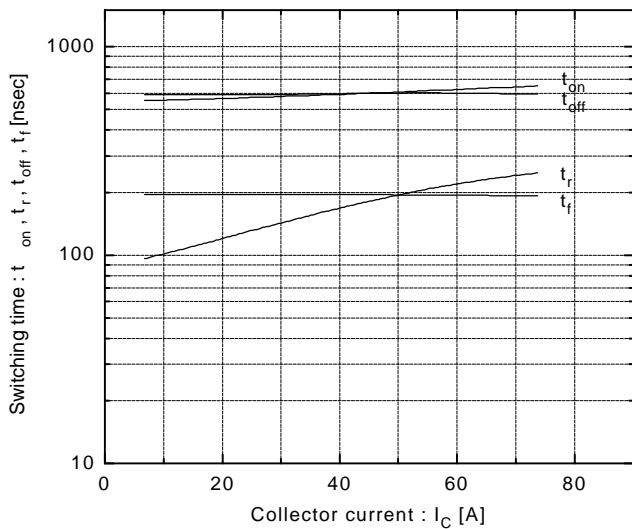


Switching time vs. Collector current
 $V_{CC}=300\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=125^\circ\text{C}$

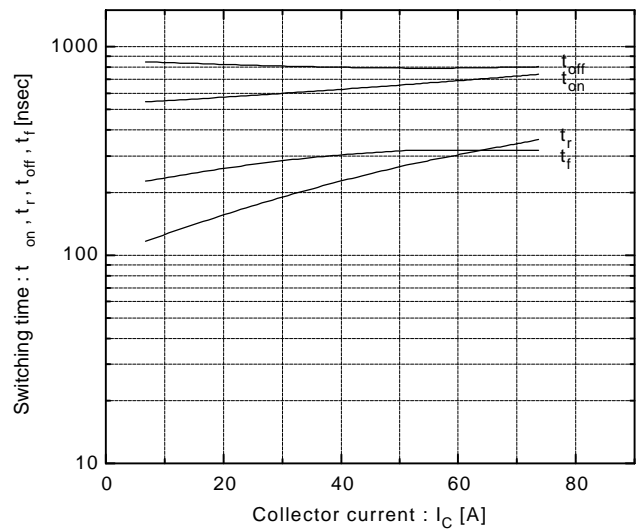


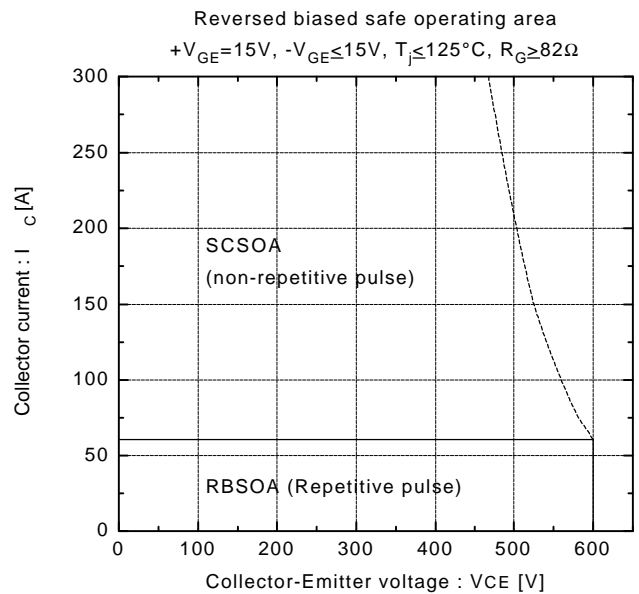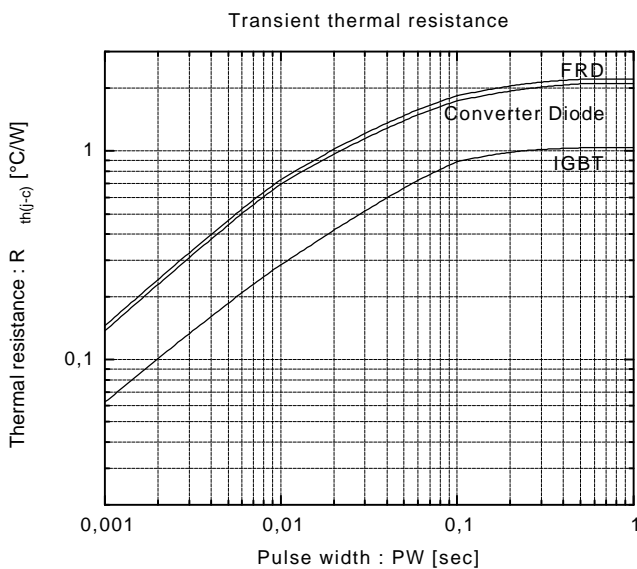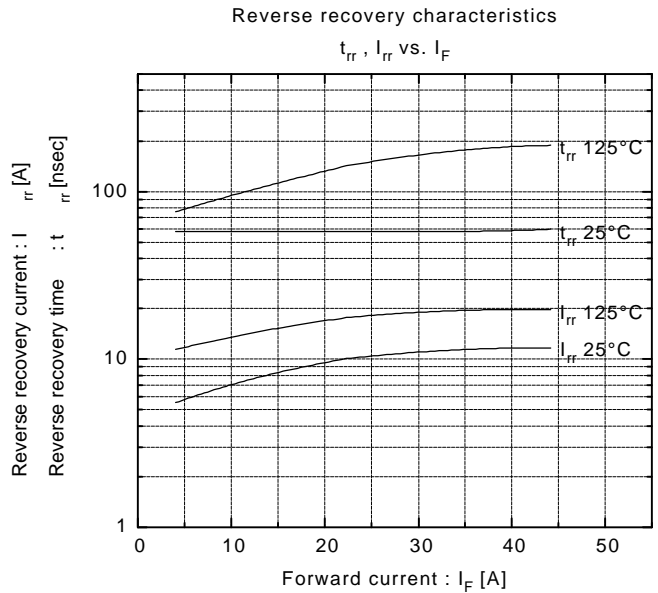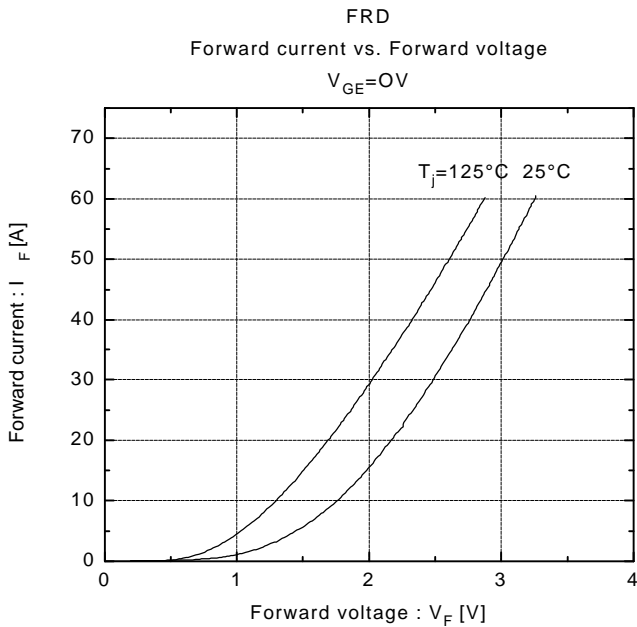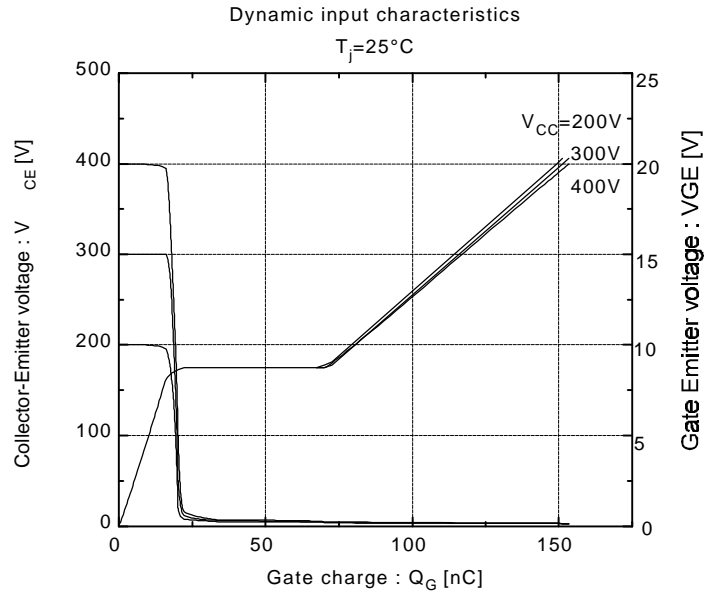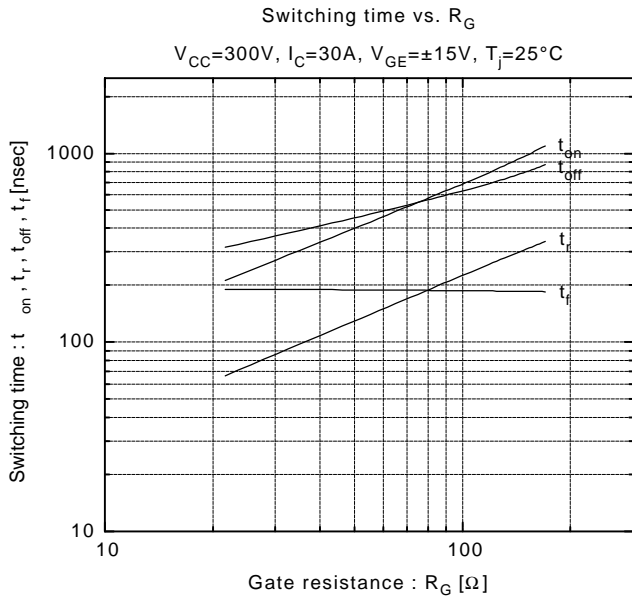


Switching loss vs. Collector current
 $V_{CC}=300V, R_G=51\Omega, V_{GE}=\pm 15V$

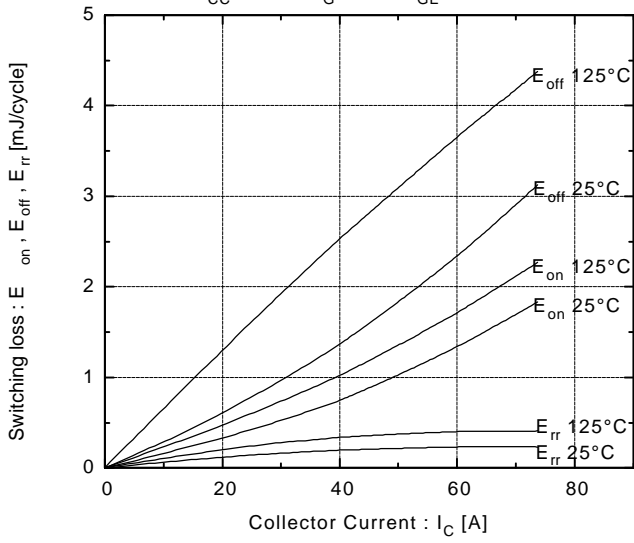

Capacitance vs. Collector-Emitter voltage
 $T_j=25^\circ C$

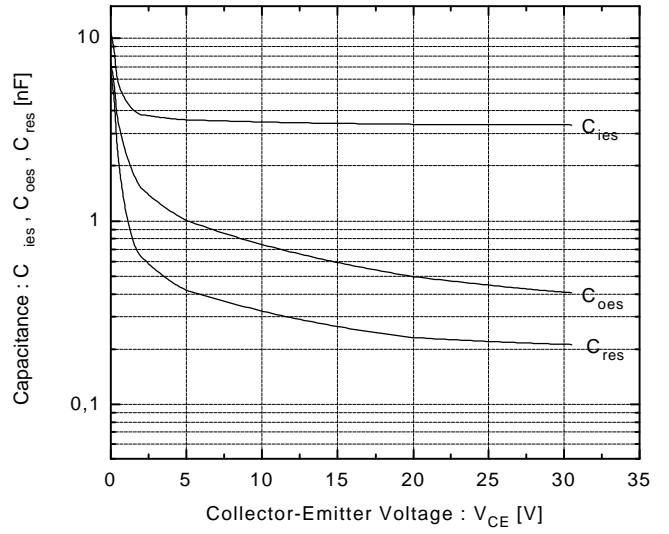


Converter Diode
 Forward current vs. Forward voltage
 $V_{GE}=0V$

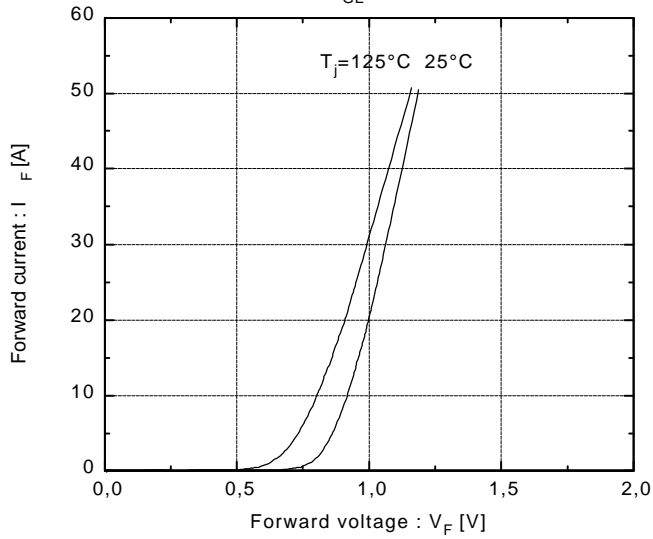

Brake Chopper IGBT


Collector current vs. Collector-Emittor voltage

$T_j=25^{\circ}\text{C}$

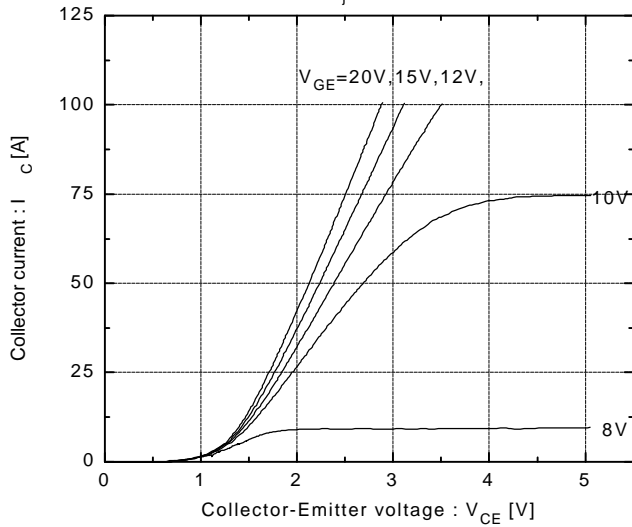


Collector current vs. Collector-Emittor voltage

$T_j=125^{\circ}\text{C}$

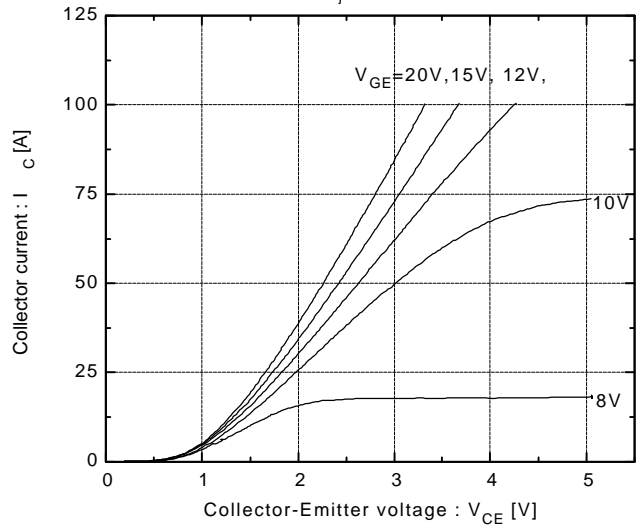


Collector-Emittor vs. Gate-Emittor voltage

$T_j=25^{\circ}\text{C}$

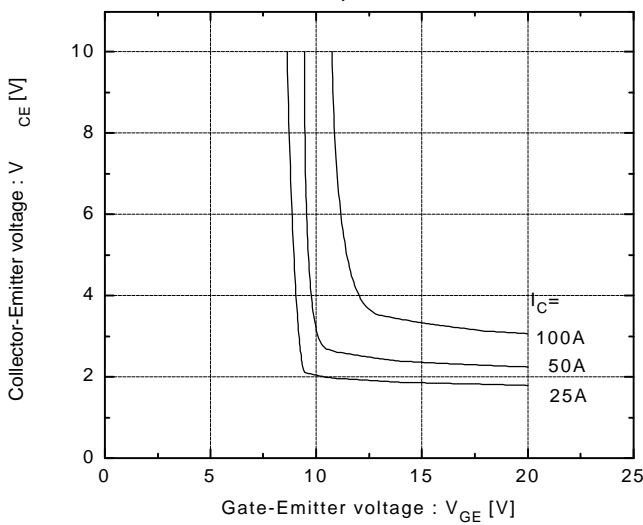


Collector-Emittor vs. Gate-Emittor voltage

$T_j=125^{\circ}\text{C}$

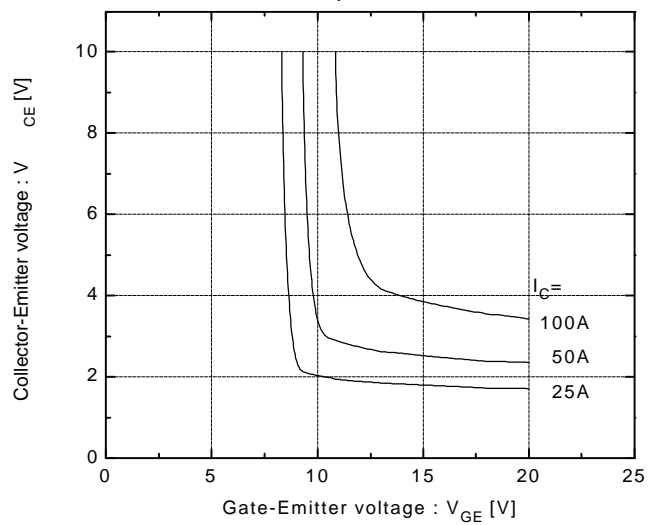


Switching time vs. Collector current

$V_{CC}=300\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=25^{\circ}\text{C}$

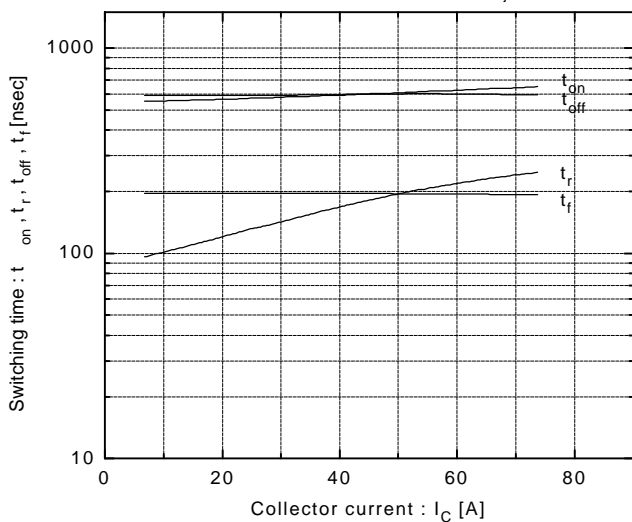

Switching time vs. Collector current


$V_{CC}=300\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=125^{\circ}\text{C}$

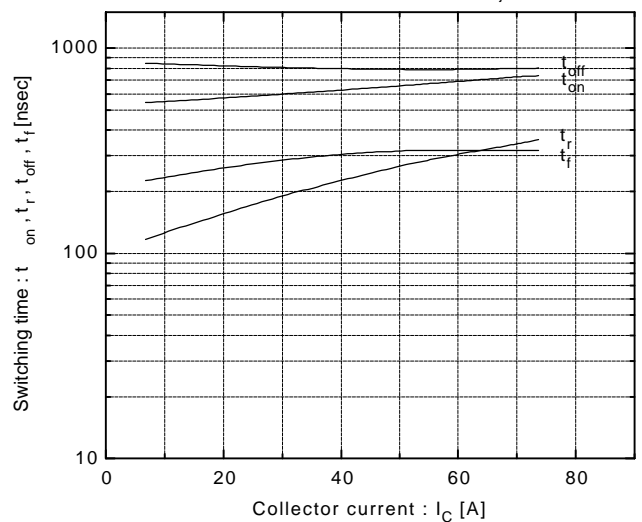

Brake Chopper IGBT


Switching time vs. R_G

$V_{CC}=300V, I_C=50A, V_{GE}=\pm 15V, T_j=25^\circ C$

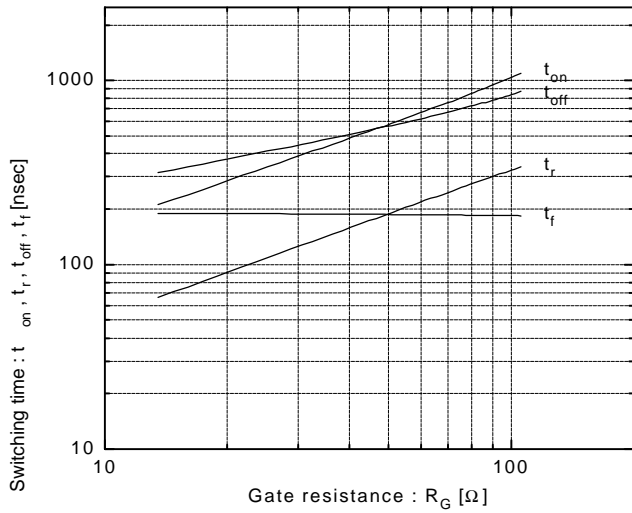


Dynamic input characteristics

$T_j=25^\circ C$

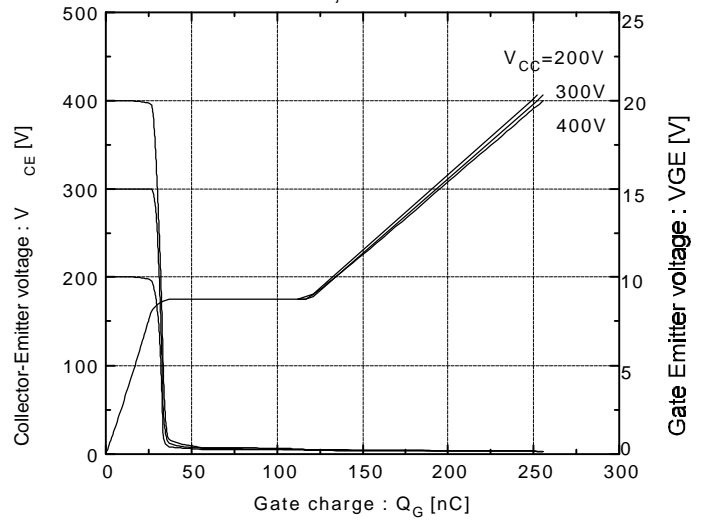


Reversed biased safe operating area

$+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^\circ C, R_G\geq 51\Omega$

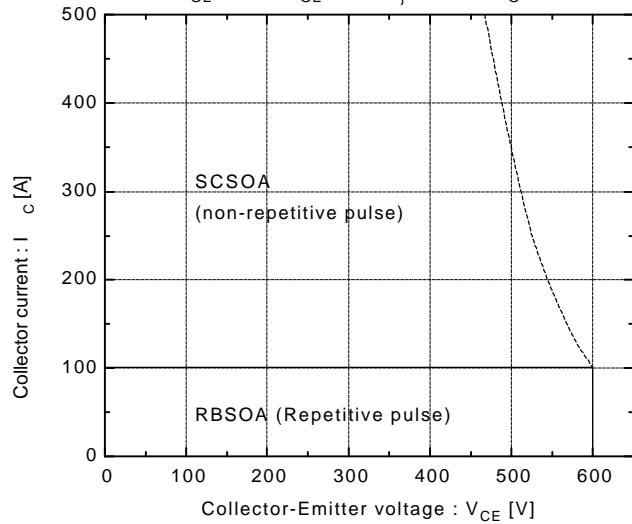

Switching loss vs. Collector current

$V_{CC}=300V, R_G=51\Omega, V_{GE}=\pm 15V$

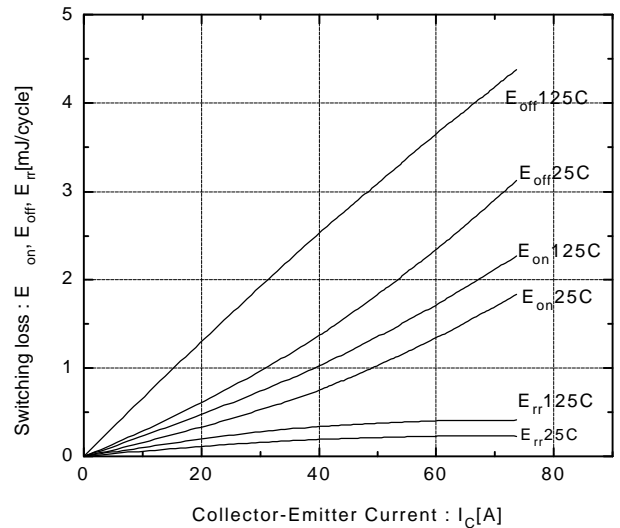

Capacitance vs. Collector-Emitter Voltage

$T_j=25^\circ C$

