

HIGH VOLTAGE DIODE

ESJA19 is high reliability resin molded type high voltage diode in small size package which is sealed (a multilayered mesa type silicon chip) by epoxy resin.

■ Features

- High reliability design.
- Ultra small package.
- High temperature resistivity

■ Applications

- Distributor-less Ignition system of Coil Distributed Type for Automobile

■ Maximum Ratings and Characteristics


- Absolute Maximum Ratings

Items	Symbols	Condition	ESJA28		Units
			-02S	-03	
Repetitive Peak Reverse Voltage	V _{RRM}	f=60Hz	2.2	2.7	kV
Non-Repetitive Peak Reverse Voltage	V _{RSM}	Ignition Pulse f=150Hz, 1 minute	2.5	3.0	kV
Average Output Current	I _O	60 Hz Sine wave	10		mA
Surge Current	I _{FSM}	60 Hz Sine-half wave peak value	1.0		A
Operating Junction Temperature	T _j		150		°C
Storage Temperature	T _{stg}		-40 to +150		°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	ESJA28		Units
			-02S	-03	
Maximum Forward Voltage Drop	V _F	I _F =10mA	7	8.4	V
Maximum Reverse Current	I _{R1}	V _R =2.2kV	5		μA
Maximum Reverse Current	I _{R2}	V _R =2.5kV	10		μA
Minimum Avalanche Breakdown Voltage	V _Z	I _Z =100μA	2.7		kV

■ Outline Drawings

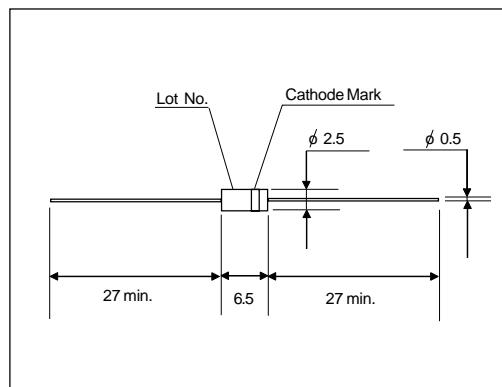

■ Cathode Mark

Type	Mark
ESJA28-02S	
ESJA28-03	▲

ESJA28(2.2kV,2.7kv/5mA)

■ Characteristics

