

YG811S06R

(60V / 5A TO-220F15)

SCHOTTKY BARRIER DIODE

■ Features

- Low V_F
- Super high speed switching.
- High reliability by planer design.

■ Applications

- High speed power switching.

■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		60	V
Repetitive peak surge reverse voltage	V_{RSM}	$t_w=500ns, duty=1/40$	60	V
Isolation voltage	V_{iso}	Terminals to Case, AC. 1min.	1500	V
Average output current	I_o	$duty=1/2, T_c=127^{\circ}C$ Rectangl wave	5	A
Surge current	I_{FSM}	Sine wave 10ms	80	A
Operating junction temperature	T_j		-40 to +150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$


- Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_F=5.0A$	0.59	V
Reverse current	I_R	$V_R=V_{RRM}$	5.0	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	5.0	$^{\circ}C/W$


- Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

■ Outline Drawings

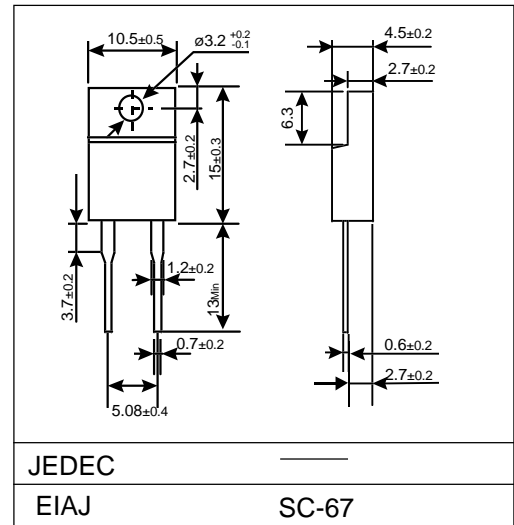

■ Connection Diagram



■ Characteristics

