

2SK3523-01R

- 1.Scope** This specifies Fuji Power MOSFET 2SK3523-01R
- 2.Construction** N-Channel enhancement mode power MOSFET
- 3.Applications** for Switching
- 4.Outview** TO-3PF

5.Absolute Maximum Ratings at Tc=25°C (unless otherwise specified)

Description	Symbol	Characteristics	Unit	Remarks
Drain-Source Voltage	V_{DS}	500	V	
Continuous Drain Current	I_D	± 21	A	
Pulsed Drain Current	I_{DP}	± 84	A	
Gate-Source Voltage	V_{GS}	± 30	V	
Maximum Avalanche Current	I_{AR}	21	A	Tch \leq 150°C
Maximum Avalanche Energy	E_{AV}	382	mJ	L=1.60mH Vcc=50V
Maximum Drain-Source dV/dt	dV_{DS}/dt	20	kV/ μ s	VDS \leq 500V
Peak Diode Recovery dV/dt	dV/dt	5	kV/ μ s	*1
Maximum Power Dissipation	P_D	3.1	W	Ta=25°C
		120		Tc=25°C
Operating and Storage Temperature range	T_{ch}	150	°C	
	T_{stg}	-55 to +150	°C	

*1 $I_F \leq -I_D, -di/dt=50A/\mu s, V_{cc} \leq BV_{DSS}, Tch \leq 150^\circ C$ **6.Electrical Characteristics at Tc=25°C (unless otherwise specified)****Static Ratings**

Description	Symbol	Conditions	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A$ $V_{GS}=0V$	500	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$I_D=250\mu A$ $V_{DS}=V_{GS}$	3.0	-	5.0	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=500V$ $V_{GS}=0V$ $T_{ch}=25^\circ C$	-	-	25	μA
		$V_{DS}=400V$ $V_{GS}=0V$ $T_{ch}=125^\circ C$	-	-	250	
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 30V$ $V_{DS}=0V$	-	10	100	nA
Drain-Source On-State Resistance	$R_{DS(on)}$	$I_D=10.5A$ $V_{GS}=10V$	-	0.20	0.26	Ω

DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.		
DRAWN '01-07-18	A. Kurosaki		DWG. NO.	MT5F11620	1/3
CHECKED '01-07-18	T. Yamada				
REVISIONS		T. HOSEN			

This material and the information herein is the property of Fuji Electric Co.,Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co.,Ltd.

Dynamic Ratings

Description	Symbol	Conditions	min.	typ.	max.	Unit
Forward Transconductance	g_{fs}	$I_D=10.5A$ $V_{DS}=25V$	(11)		-	S
Input Capacitance	C_{iss}	$V_{DS}=25V$	-		(4600)	pF
Output Capacitance	C_{oss}	$V_{GS}=0V$	-		(465)	
Reverse Transfer Capacitance	C_{rss}	$f=1MHz$	-		(20)	
Turn-On Time	$t_{d(on)}$	$V_{cc}=300V$	-		(50)	ns
	t_r	$V_{GS}=10V$	-		(45)	
Turn-Off Time	$t_{d(off)}$	$I_D=10.5A$	-		(90)	
	t_f	$R_{GS}=10\Omega$	-		(30)	
Total Gate Charge	Q_G	$V_{cc}=300V$	-		(100)	nC
Gate-Source Charge	Q_{GS}	$I_D=21A$	-		(40)	
Gate-Drain Charge	Q_{GD}	$V_{GS}=10V$	-		(35)	

Reverse Diode


Description	Symbol	Conditions	min.	typ.	max.	Unit
Avalanche Capability	I_{AV}	$L=1.60mH$ $T_{ch}=25^\circ C$ $V_{cc}=50V$	21	-	-	A
Diode Forward On-Voltage	V_{SD}	$I_F=21A$ $V_{GS}=0V$ $T_{ch}=25^\circ C$	-	1.00	1.50	V
Reverse Recovery Time	t_{rr}	$I_F=21A$ $V_{GS}=0V$	-	1.32	-	μs
Reverse Recovery Charge	Q_{rr}	$-di/dt=100A/\mu s$ $T_{ch}=25^\circ C$	-	12.0	-	μC

7. Thermal Resistance

Description	Symbol	min.	typ.	max.	Unit
Channel to Case	$R_{th(ch-c)}$			1.04	$^\circ C/W$
Channel to Ambient	$R_{th(ch-a)}$			40.0	$^\circ C/W$


	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.	
DRAWN				DWG. NO. MT5F11620	2/3
CHECKED					
REVISIONS					

FUJI POWER MOSFET

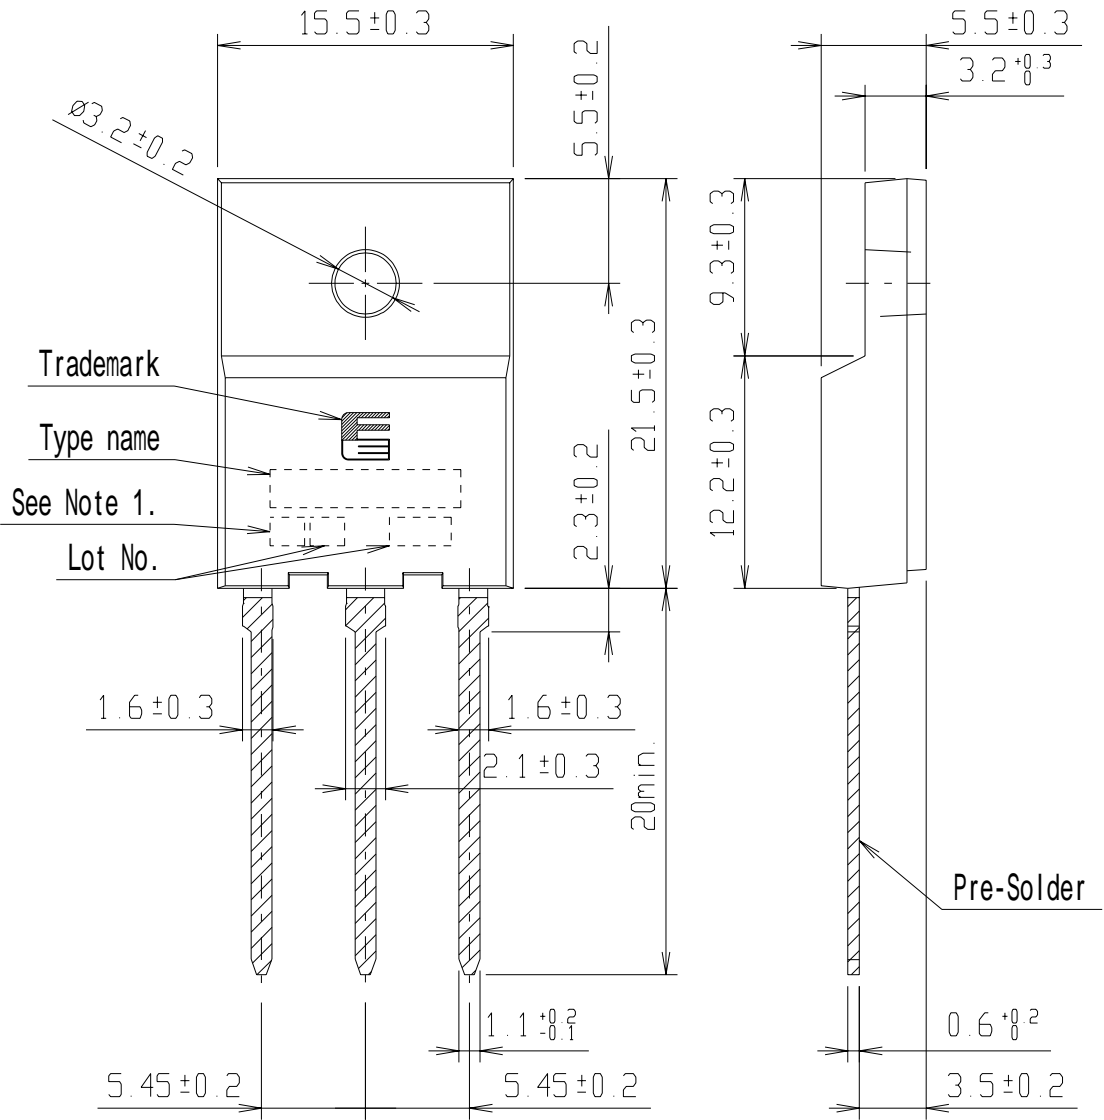

Trademark
Type name
See Note 1.
Lot No.

Pre-Solder



CONNECTION

- ① GATE
- ② DRAIN
- ③ SOURCE

Note 1. Guaranteed mark of avalanche ruggedness.

DIMENSIONS ARE IN MILLIMETERS.

This material and the information herein is the property of Fuji Electric Co.,Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co.,Ltd.

	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.
DRAWN				MT5F11620 3/3
CHECKED				
REVISIONS				