

SPECIFICATION

Device Name : Intelligent Power MOSFET

Type Name : F 5 0 1 9

Spec. No. : **MS5 F4286**

Fuji Electric Co., Ltd.
Matsumoto Factory

	DATE	NAME	APPROVED		Fuji Electric Co., Ltd.	
DRAWN	March - 19 - 1998	S. Kinuchi			DWG. NO.	MS5 F4286
CHECKED	March - 19 - 1998	S. Furukawa				
						1/13

;

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall not be reproduced, copied, altered, or otherwise used in any way whatsoever for the use of any third party without the manufacturing permission without the express written consent of Fuji Electric Co., Ltd.

CH 5110

2/13

1. Scope
This specifies Fuji Intelligent Power MOSFET F 5 0 1 9 - S
2. Construction
Self-Isolation Structure
Output Part; N-channel enhancement mode power MOSFET
3. Application
For switching
4. Outview
T pack S-type. (See to 6/13 page)
5. Absolute maximum ratings (at $T_j=25^\circ\text{C}$, unless otherwise specified.)

Description	Symbol	Characteristics	Unit	Conditions
Drain-source voltage	V_{DS}	4 0	V	D C
Gate-source voltage	V_{GS}	D C - 0.3 ~ 7.0	V	D C
Continuous drain current	I_D	1 2	A	$T_c = 25^\circ\text{C}$
Maximum power dissipation	P_D	3 0	W	$T_c = 25^\circ\text{C}$
Operating junction temperature	T_j	1 5 0	$^\circ\text{C}$	_____
Storage temperature range	T_{stg}	- 5 5 ~ 1 5 0	$^\circ\text{C}$	_____

6. Electrical characteristics (at $T_j=25^\circ\text{C}$, unless otherwise specified.)

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Drain-source clamp voltage	V_{DS}	$I_D = 1 \text{ mA}$ $V_{GS} = 0 \text{ V}$	4 0		6 0	V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 10 \text{ mA}$ $V_{DS} = 13 \text{ V}$	1.0		2.8	V
Operation gate voltage	$V_{GS(p)}$		3.5		7.0	V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 30 \text{ V}$ $V_{GS} = 0 \text{ V}$			1.0	mA
Gate-source leakage current	$I_{GS(n)}$	$V_{GS} = 5 \text{ V}$			500	μA
	$I_{GS(un)}$				800	μA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D = 5 \text{ A}$ $V_{GS} = 5 \text{ V}$			140	m Ω
Forward on voltage	V_{SD}	$I_F = 24 \text{ A}$			2.0	V

* Under normal operation ** Under self protection

Fuji Electric Co., Ltd.

DWG. NO.

MS5F4286

3/13

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Turn-on time	t_{on}	$V_{DS} = 13\text{ V}$ $R_L = 2.6\ \Omega$ $V_{GS} = 5\text{ V}$			200	μS
Turn-off time	t_{off}				200	μS
Over-temperature protection	T_{trip}	$V_{GS} = 5\text{ V}$	150		210	$^{\circ}\text{C}$
Short circuit protection	I_{sc}	$V_{GS} = 5\text{ V}$	12		32	A
Single pulse inductive load switch-off energy dissipation	E_{CL}	$I_o = 8\text{ A}$ $T_J = 150^{\circ}\text{C}$	100			mJ


7. Thermal resistance

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	$R_{th(j-c)}$	Junction-case			4.2	$^{\circ}\text{C/W}$
	$R_{th(j-a)}$	Junction-ambient			100	$^{\circ}\text{C/W}$

8. Electrostatic discharge

Description	Conditions	Characteristics			Unit
		Min.	Typ.	Max.	
Drain-source	150 pF, 150 Ω	± 15			kV
Gate-source		± 0.5			kV

9. Timing chart

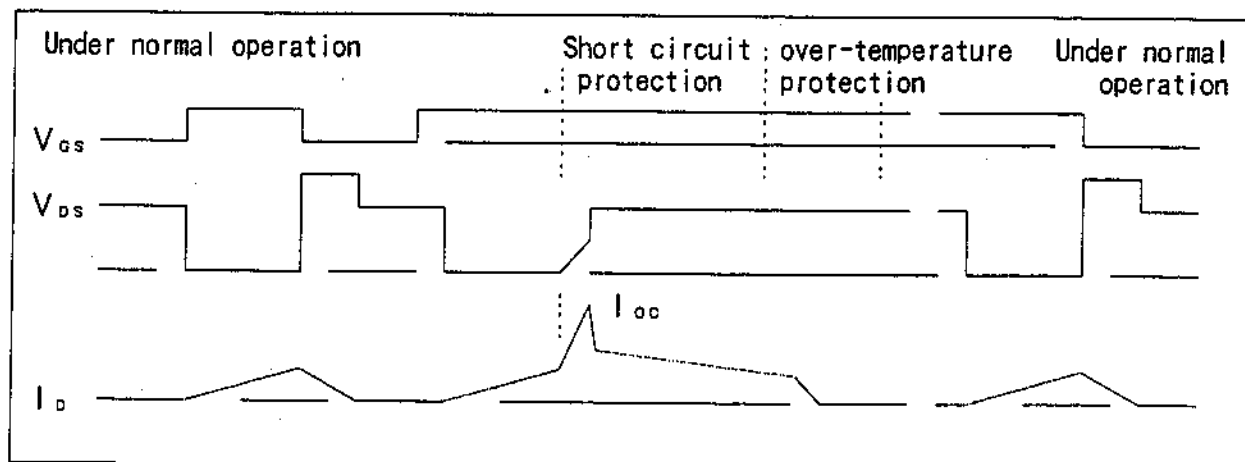

Fuji Electric Co., Ltd.


DWG. NO.

MS5F4286

4/13

H04-004-03

1 0. Block diagram

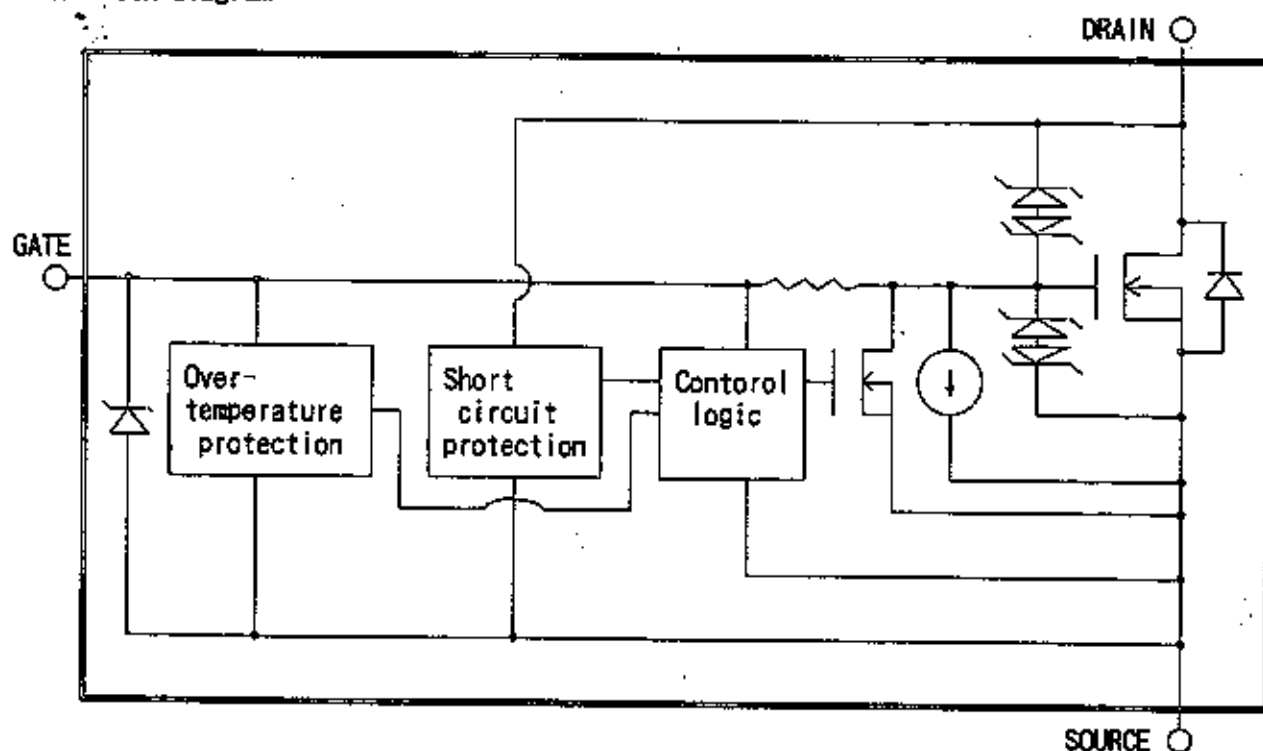

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

Fuji Electric Co., Ltd.

DWG. NO.



MS5F4286

S/13


H04-004-03

FUJI POWER MOS FET

TYPE : F5019

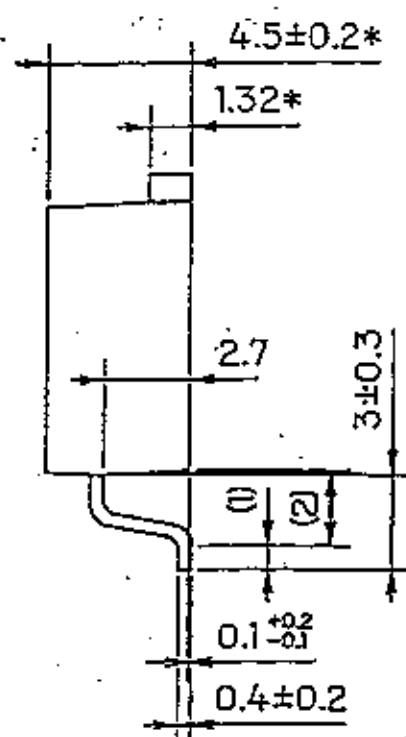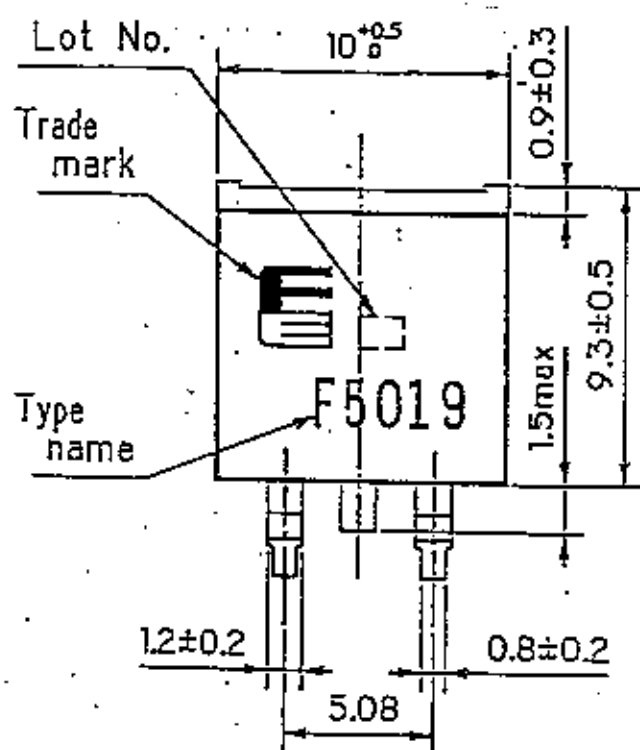

BOTTOM VIEW

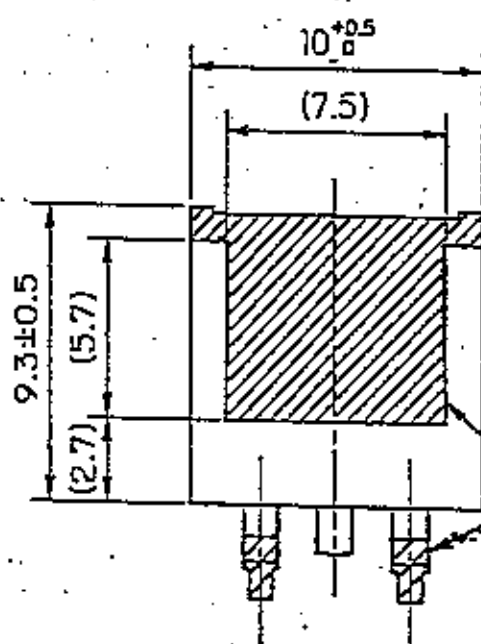

CONNECTION

- ① GATE
- ② DRAIN
- ③ SOURCE

PRE SOLDER

Notes

1. () : REFERENCE DIMENSIONS.
2. * : DO NOT INCLUDE SOLDER.

DIMENSIONS ARE IN MILLIMETERS.

Fuji Electric Co., Ltd.


DWG. NO.

MS5F4286


6/13

H04-004-03

Drain-source clamp voltage
 $V_{DSS}=f(T_j) : I_D=1\text{mA}, V_{GS}=0\text{V}$

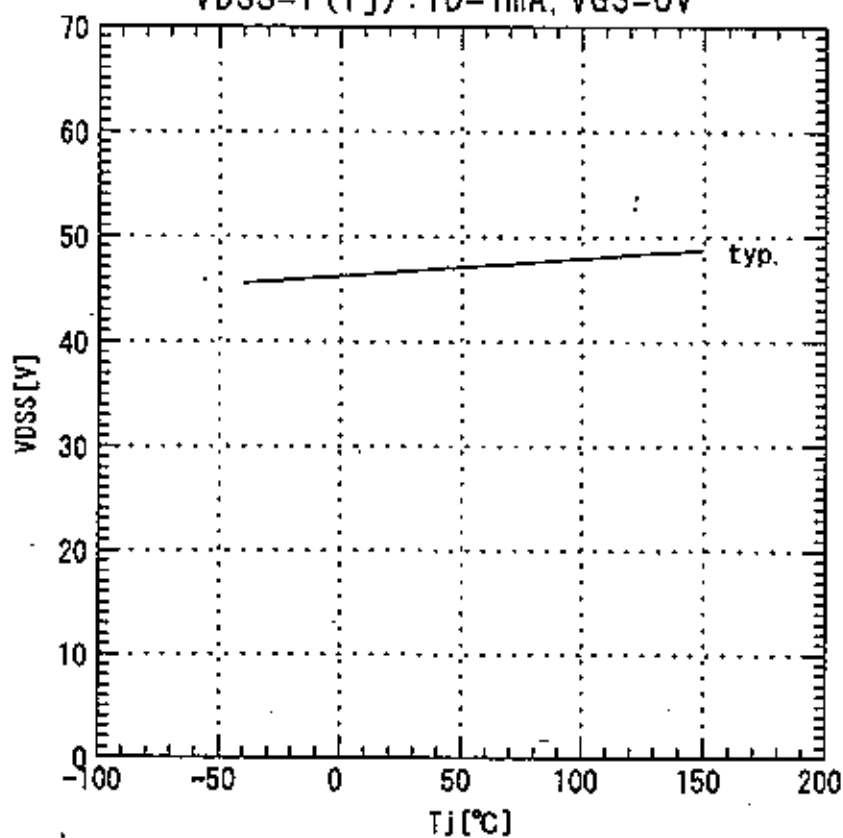


Gate threshold voltage
 $V_{GS(th)}=f(T_j) : V_{DS}=13\text{V}, I_D=10\text{mA}$

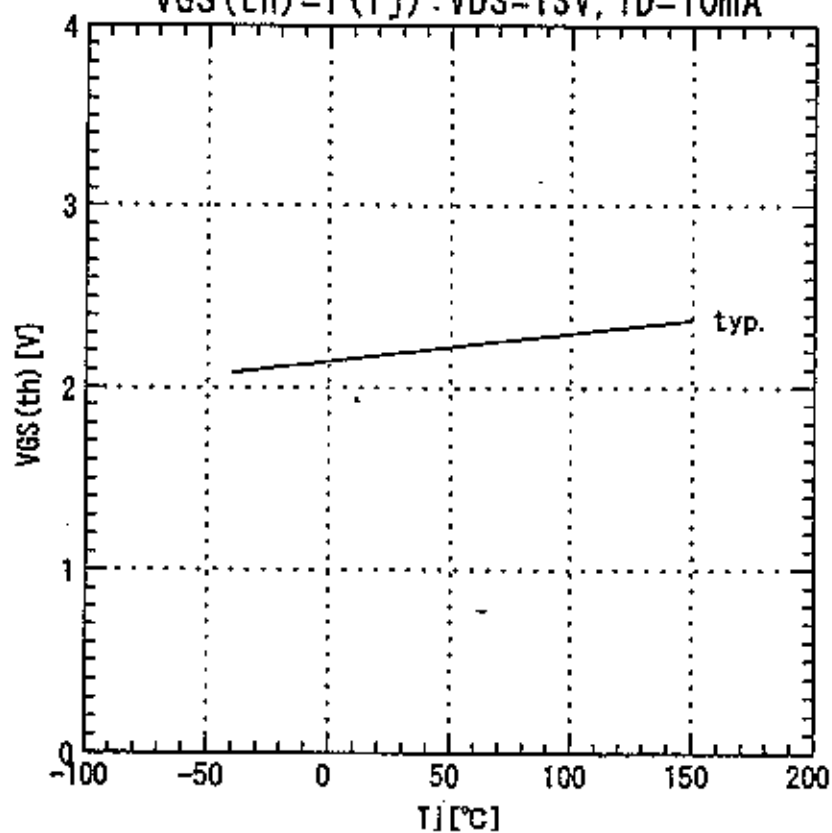


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


Gate-source leakage current
 $I_{GS}(n) = f(T_j) : V_{GS} = 5V, V_{DS} = 0V$

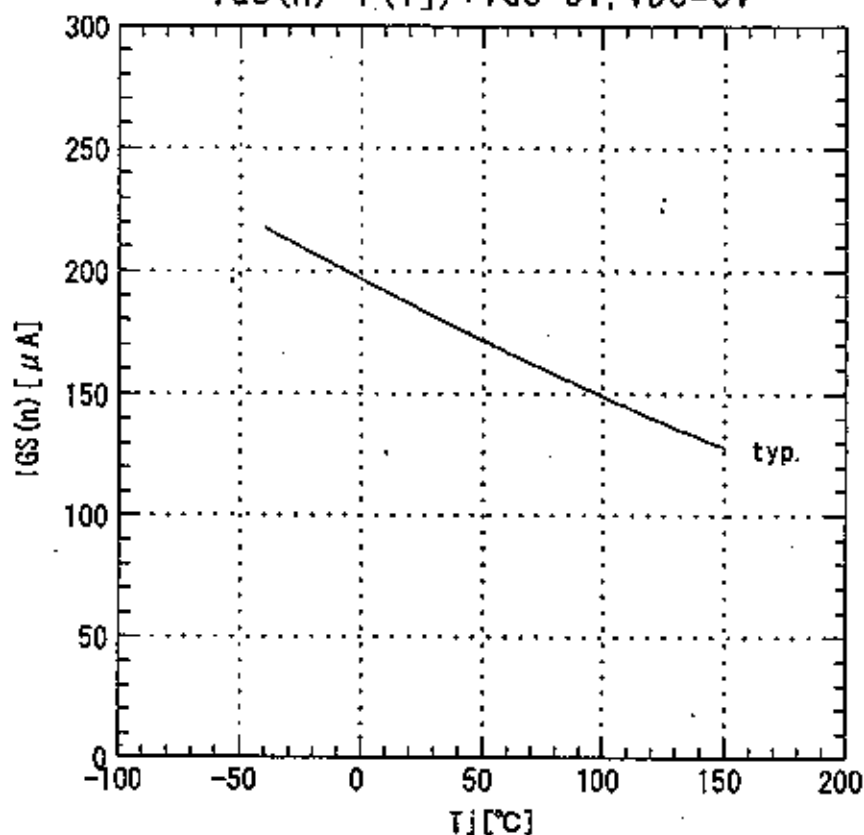


Gate-source leakage current
 $I_{GS}(n) = f(V_{GS}) : T_j = 25^\circ C, V_{DS} = 0V$

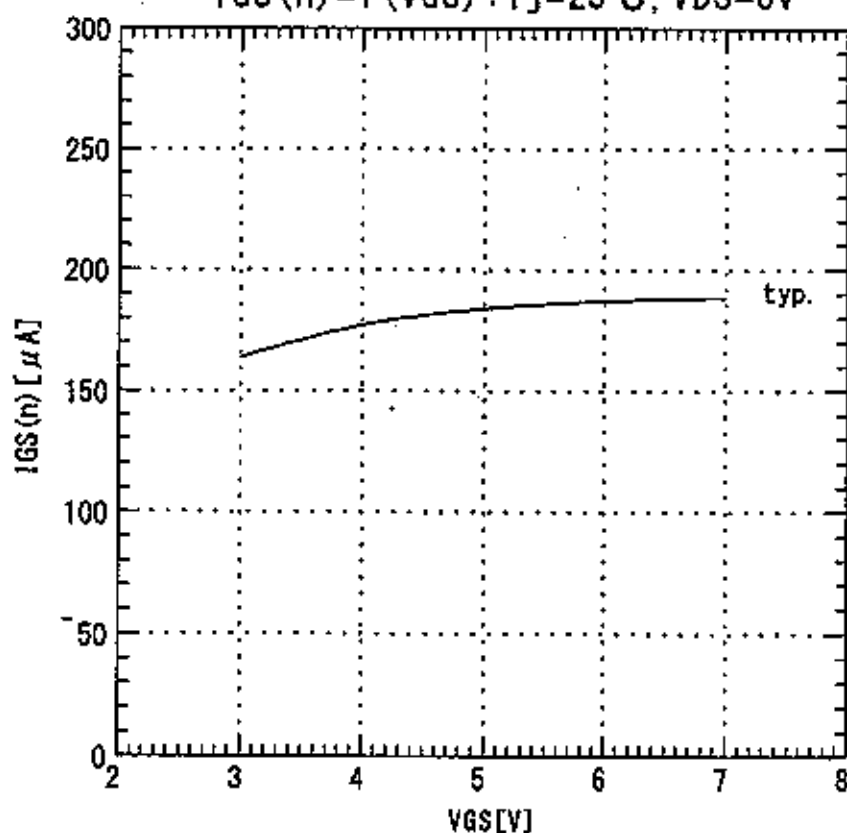

Drain-source on-state resistance
 $R_{DS(on)} = f(T_j) : I_D = 5A, V_{GS} = 5V$

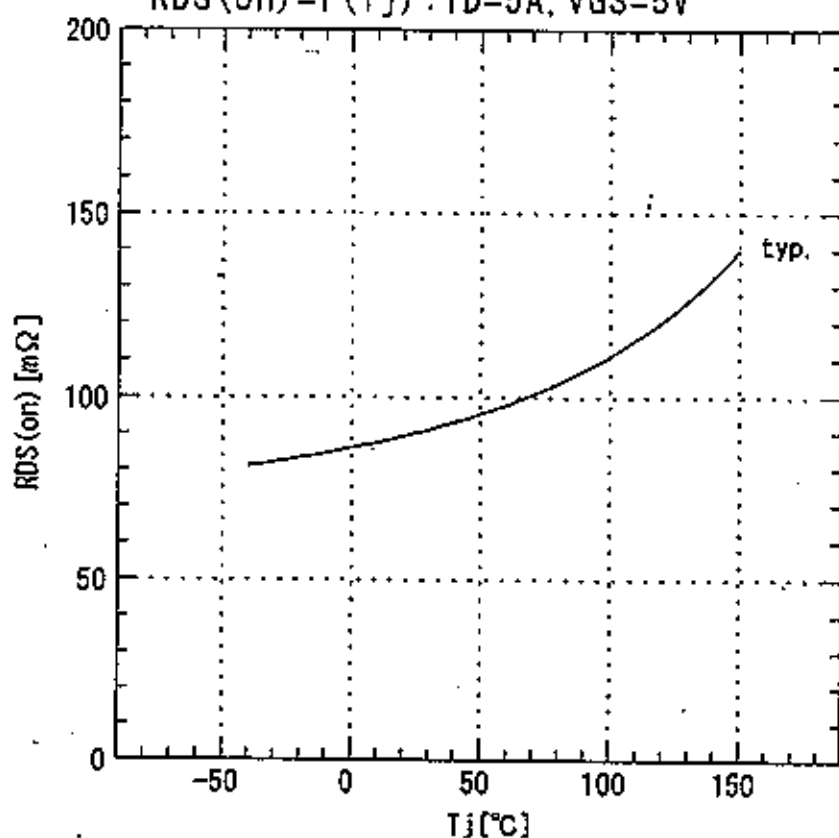


Drain-source on-state resistance
 $R_{DS(on)} = f(V_{GS}) : I_D = 5A, T_j = 25^\circ C$

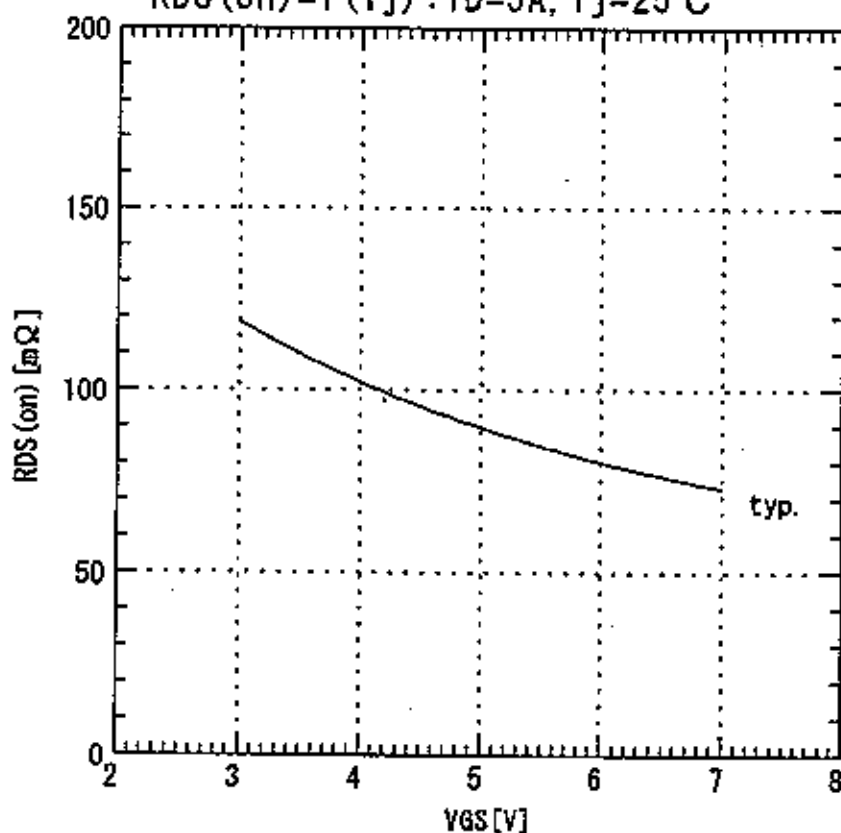


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Zero gate voltage drain current
 $I_{DSS}=f(T_j) : V_{DS}=30V, V_{GS}=0V$

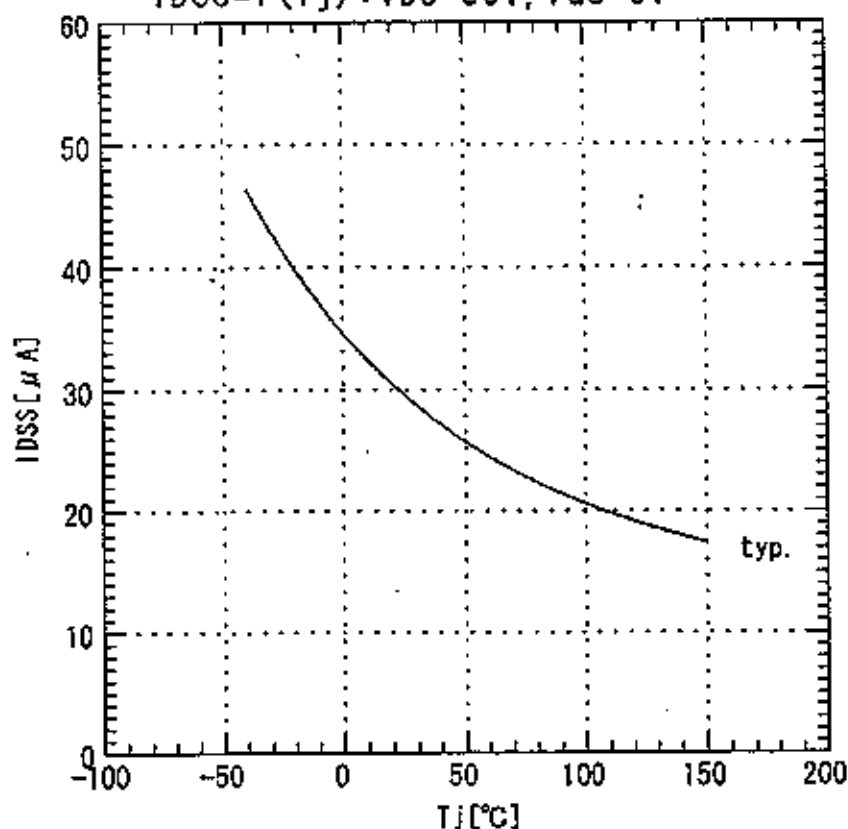


Turn-on time, Turn-off time
 $t_{on}, t_{off}=f(T_j) : V_{GS}=5V, I_D=5A, V_{DS}=13V$

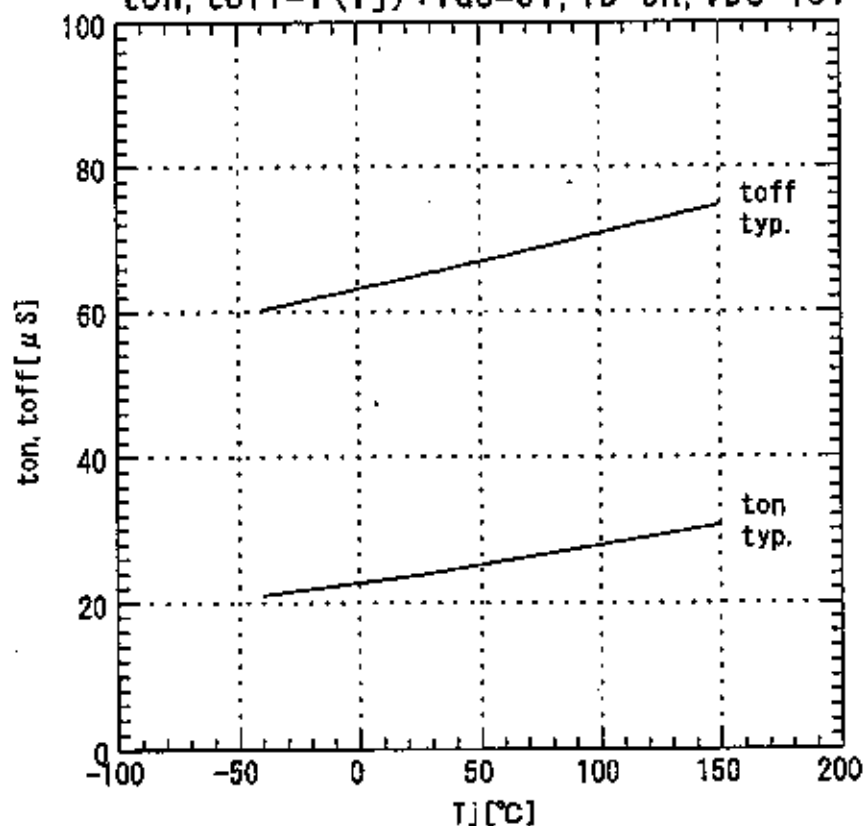


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Short circuit detection
 $I_{OC}=f(T_j) : V_{GS}=5V$

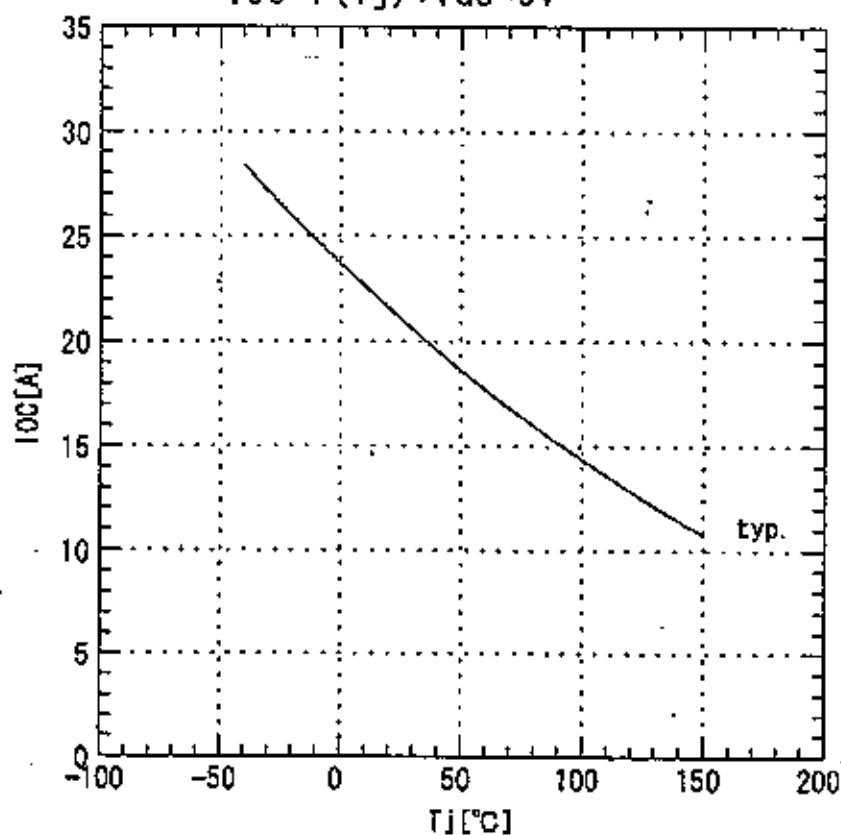

Short circuit detection
 $I_{OC}=f(V_{GS}) : T_j=25^{\circ}C$

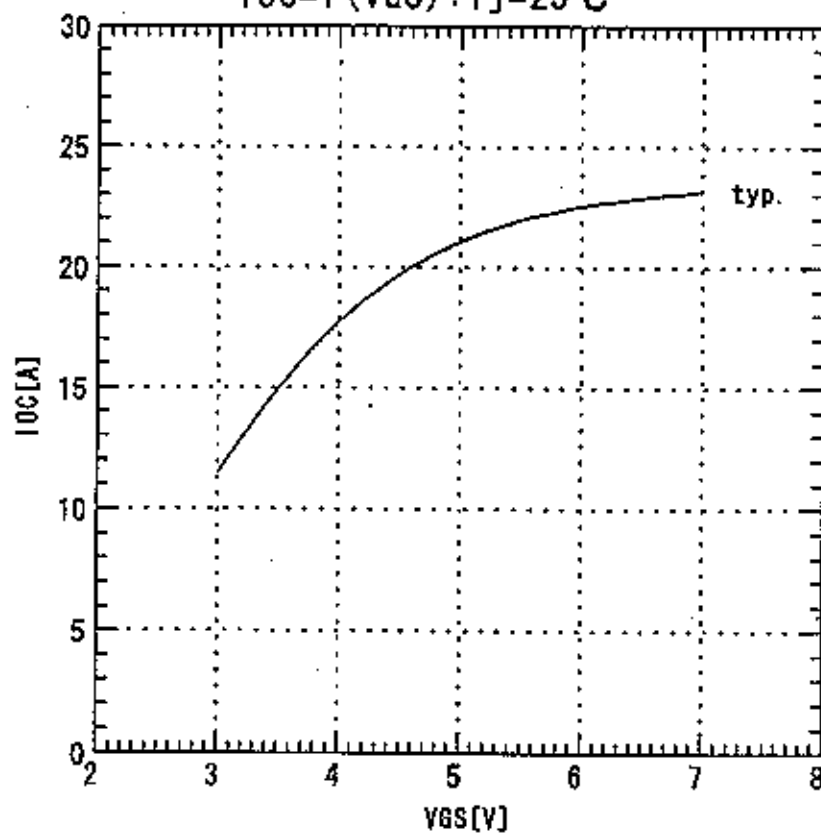

Fuji Electric Co., Ltd.


ENG. NO.

MS5F4286

1/3

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward on voltage
 $I_F = f(V_{SD})$

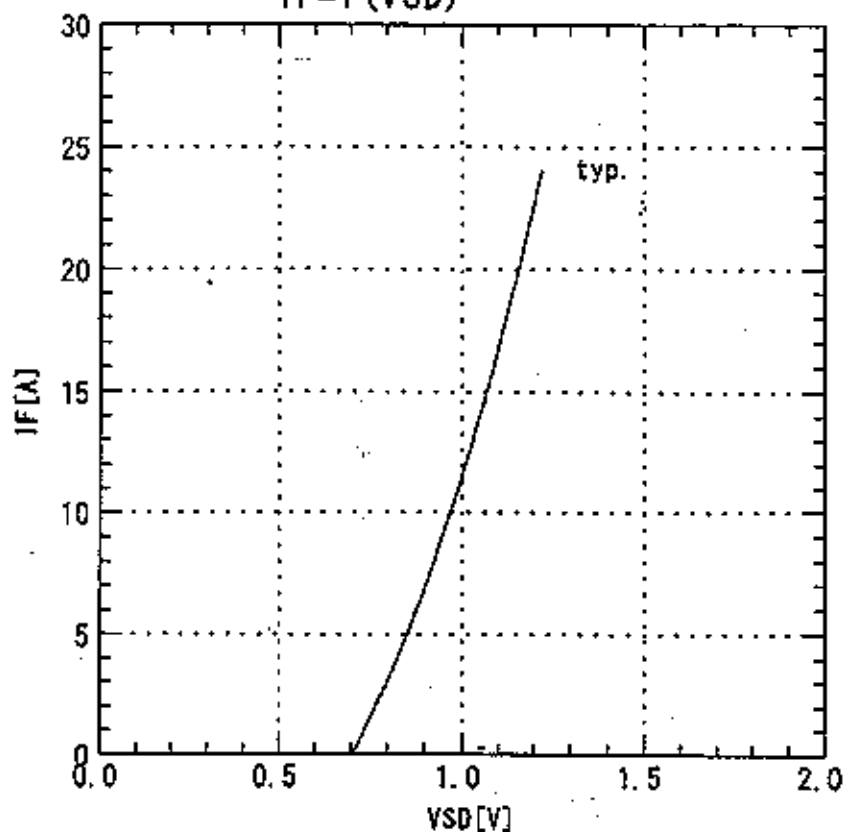

Fuji Electric Co., Ltd.


DWG. NO.

MS5F4286

12/13

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party not used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Continuous Drain Current VS Ambient Temperature
 $I_D = f(T_a)$: Mounting Pad Size(a)=10mm

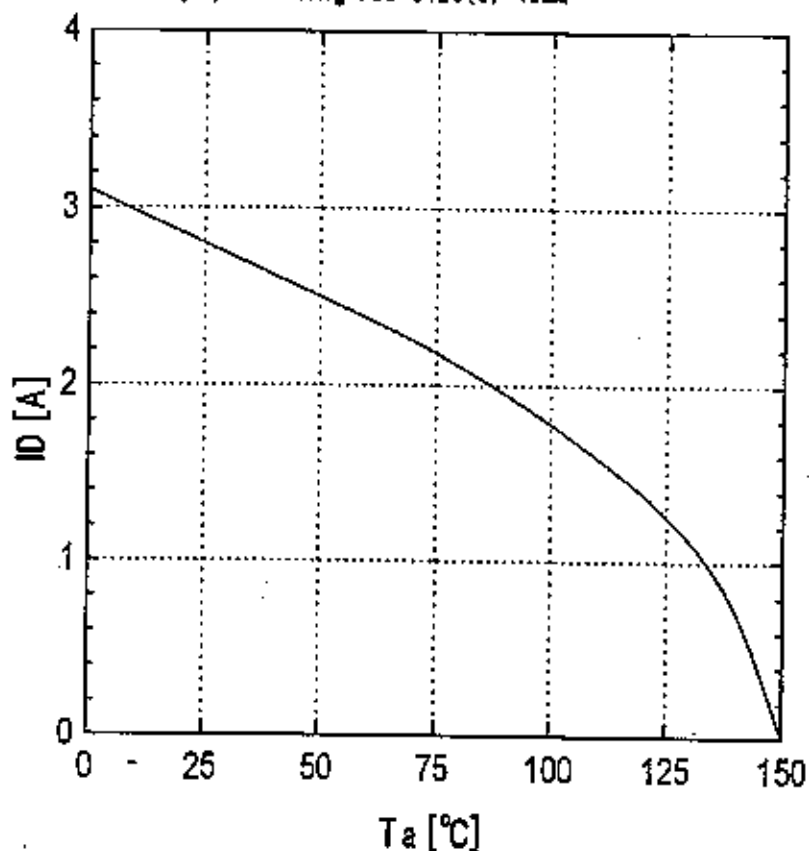

Mounting Pad Size VS Drain Current Ratio
 Drain Current Ratio=f(Mounting Pad Size)

